

La Crosse

Gourmet Markets Favorite



This one of kind Display case is specifically designed with the highest Hygienic standards in mind. It is the only Food display case on the market that allows the operator to access the interior and clean the entire basin. Thanks to a unique hinged deck, supported by hydraulic pistons that counter balance the weight of the Evaporator coil, fan assembly and stainless Deck. It is available in 90° corners for Deli, Open Grab and Go self-serve, Hot food and Ice Cream Gelato configurations. A perfect streamline with a non glaring glass and an array of custom finishes.



OSCARTEK®

Discover the Art of Display...

La Crosse Photos



STANDARD FEATURES

Double pane lift-up front glass
Double pane sides
Diffused LED lighting 3000°K
Plexiglass sliding doors
Internal condensing unit
Cases ship standard unfinished

OPTIONS

Bumper addition for cart/trolley
Rolling curtain
Paper holder
Pull-out faucet inside the tank
Scale holder
External condensing unit
Intermediate shelf
Plexiglass pans holder
Popsicle display tray (stainless steel & plastic.
Plastic available in color options (see images on the right)
RAL color/laminate front and side panels
Casters



LA CROSSE GELATO					
TECHNICAL FEATURES		MODELS			
		LA CROSSE G1150	LA CROSSE G1650	LA CROSSE G2150	LA CROSSE G2150 DUAL TEMP
External Dimensions (L-D-H) Inches-MM	Inches MM	*46 7/8" - 45 3/8" - 45 1/4" *1190 - 1152 - 1150	*66 9/16" - 45 3/8" - 45 1/4" *1690 - 1152 - 1150	*86 1/4" - 45 3/8" - 45 1/4" *2190 - 1152 - 1150	*86 1/4" - 45 3/8" - 45 1/4" *2190 - 1152 - 1150
Crated Dimensions (L-D-H) Inches-MM	Inches MM	53 7/8" - 53 7/8" - 55 1/8" 1370 - 1370 - 1400	73 5/8" - 53 7/8" - 55 1/8" 1870 - 1370 - 1400	93 1/4" - 53 7/8" - 55 1/8" 2368 - 1370 - 1400	93 1/4" - 53 7/8" - 55 1/8" 2368 - 1370 - 1400
5 Liter Pan Capacity* 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)
6.5 Liter Pan Capacity* 14 3/16" x 9 13/16" x 3 1/8" (360mm x 250mm x 80mm)	Pan Configuration	8	12	16	16 (8 + 8)
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-22°C / -13°F	-22°C / -13°F	-22°C / -13°F	-22°C / -13°F
Compressor	Nr./Type	1 / Semi-Hermetic	1 / Semi-Hermetic	1 / Semi-Hermetic	1 / Semi-Hermetic
BTU's @ -25°F Evap Temperature	BTU'S	2800 BTU'S	3966 BTU'S	5040 BTU'S	3400 BTU'S + 3400 BTU'S
Electric Supply	(V/Ph/Hz)	208-220V/3/60	208-220V/3/60	208-220V/3/60	208-220V/3/60
Power Consumption	(W/A)	2000W / 5.5A	3400W / 8.5A	3950W / 10A	3950W / 10A
Defrost	Mode/Type	Automatic - Reverse Cycle	Automatic - Reverse Cycle	Automatic - Reverse Cycle	Automatic - Reverse Cycle
Climatic Class	N°/°C/F°/H.R.	3/25/77/60%	3/25/77/60%	3/25/77/60%	3/25/77/60%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs	330Kgs / 727Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs	510Kgs / 1124Lbs

* DIMENSIONS ARE WITHOUT RED PANELS


* PANS NOT INCLUDED

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.






361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com






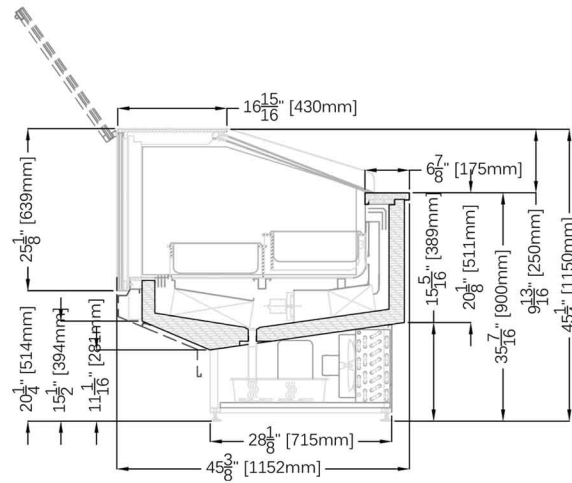


PLAN VIEWS - 5 LITER PANS: LA CROSSE G1150, LA CROSSE G1650, LA CROSSE G2150

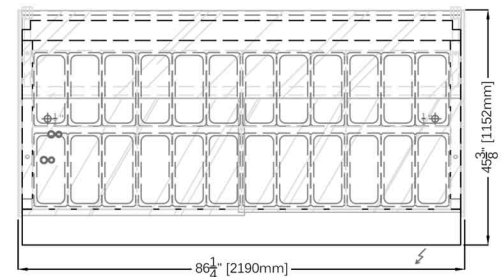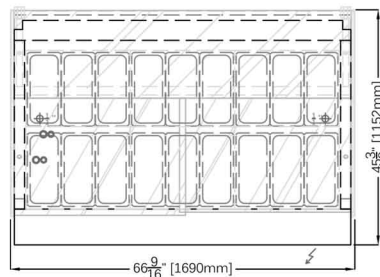

PLAN VIEWS - 8 LITER PANS: LA CROSSE G1150, LA CROSSE G1650, LA CROSSE G2150

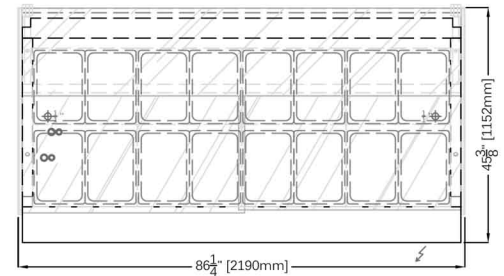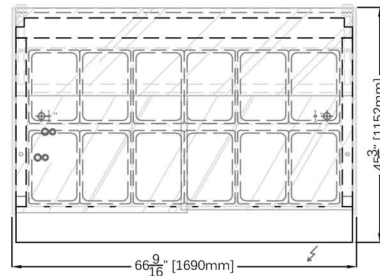

REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE G1150, LA CROSSE G1650, LA CROSSE G2150

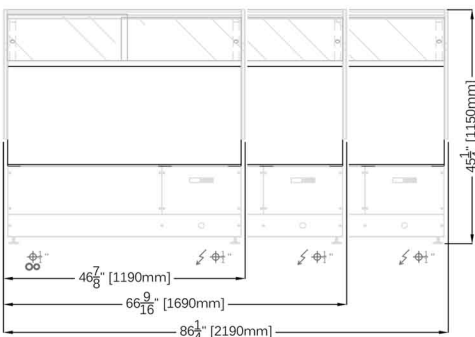

ELECTRICAL LEGEND	
	REFRIGERATED LINES
	DRAIN
	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

Double pane lift-up front glass
Double pane sides
Lift-up deck and evaporator to allow the perfect cleaning of the tank
Diffused LED lighting 3000°K
Plexiglass sliding doors
Internal condensing unit
Cases ship standard unfinished

OPTIONS

Bumper addition for cart/trolley
Rolling curtain
Paper holder
Pull-out faucet inside the tank
Cutting board with knives pocket
Scale holder
External condensing unit
Intermediate shelf
RAL color/laminate front and side panels
Casters



LA CROSSE DELI/PASTRY					
TECHNICAL FEATURES		MODELS			
		LA CROSSE DP1150	LA CROSSE DP1650	LA CROSSE DP2150	LA CROSSE DPA90
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"	*86 1/4" - 45 3/8" - 45 1/4"	*63 5/8" - 45 3/8" - 45 1/4"
Inches-MM	MM	*1190 - 1152 - 1150	*1690 - 1152 - 1150	*2190 - 1152 - 1150	*1616 - 1152 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"	70" - 53 7/8" - 55 1/8"
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2368 - 1370 - 1400	1778 - 1370 - 1400
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	2°C / 35°F	2°C / 35°F	2°C / 35°F	2°C / 35°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU's @ +14°F Evap Temperature	BTU's	2400 BTU'S	3330 BTU'S	3625 BTU'S	5200 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 120/1/60 (USA)	230/1/50 (EU) 120/1/60 (USA)	230/1/50 (EU) 120/1/60 (USA)	230/1/50 (EU) 120/1/60 (USA)
Power Consumption	(W/A)	420W / 2.5A	650W / 4A	850W / 4.5A	1050W / 6A
Defrost	Mode/Type	Electric	Electric	Electric	Electric
Climatic Class	N°/°C/°F/H.R.	3/25/77/60%	3/25/77/60%	3/25/77/60%	3/25/77/60%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs	535Kgs / 1179Lbs



* DIMENSIONS ARE WITHOUT SIDE PANELS

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



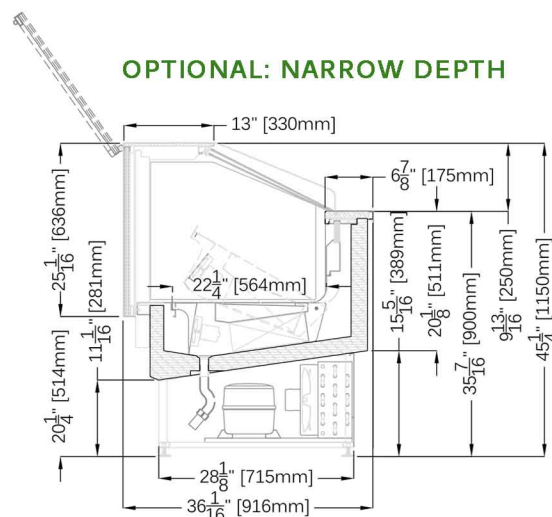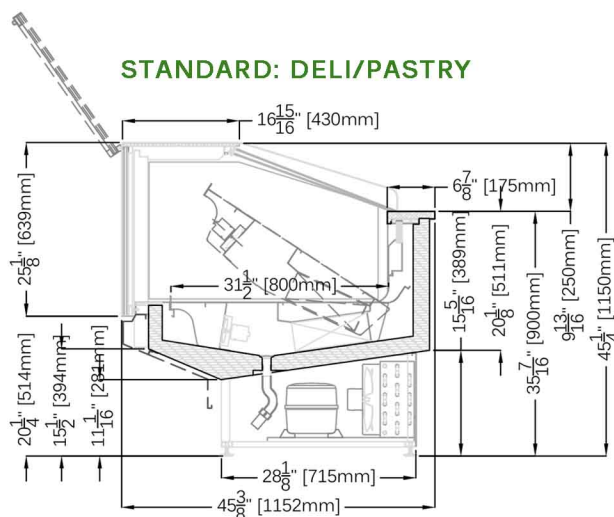


PLAN VIEWS: LA CROSSE DP1150, LA CROSSE DP1650, LA CROSSE DP2150, LA CROSSE DPA90

LA CROSSE LINEAR MODELS

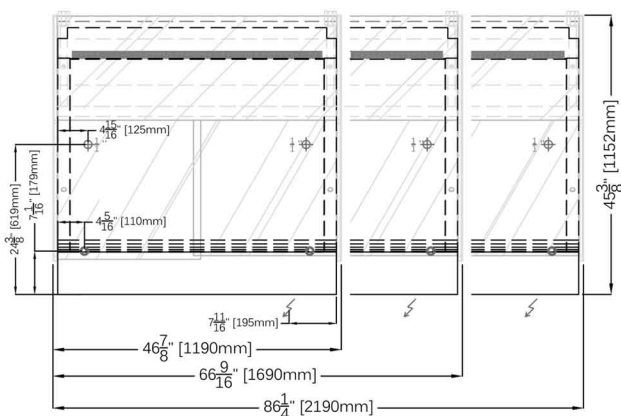


LA CROSSE DPA90

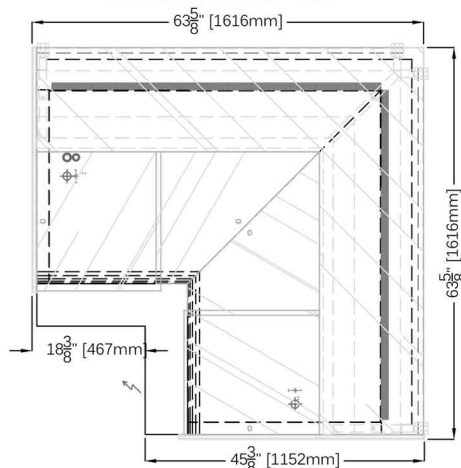


REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE DP1150, LA CROSSE DP1650, LA CROSSE DP2150, LA CROSSE DPA90

LA CROSSE LINEAR MODELS

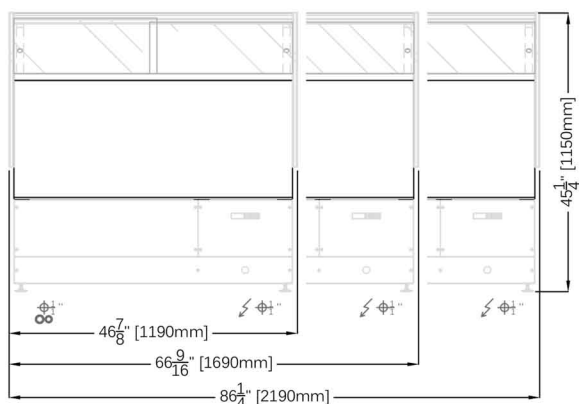

LA CROSSE DPA90

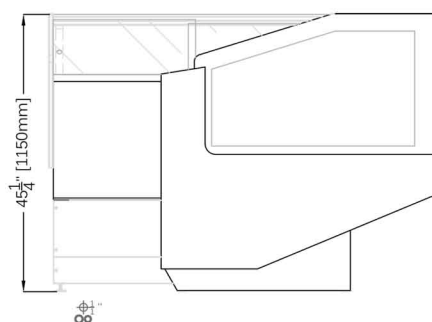

ELECTRICAL LEGEND

∞	REFRIGERATED LINES
⊕ 1/4"	DRAIN
⚡	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

Double pane lift-up front glass
Double pane sides
Lift-up deck and evaporator to allow the perfect cleaning of the tank
Diffused LED lighting 3000°K
Plexiglass sliding doors
Internal condensing unit
Humidity control
Cases ship standard unfinished

OPTIONS

Bumper addition for cart/trolley
Rolling curtain
Paper holder
Pull-out faucet inside the tank
Cutting board with knives pocket
Scale holder
External condensing unit
Intermediate shelf
RAL color/laminate front and side panels
Casters



LA CROSSE CHOCOLATE					
TECHNICAL FEATURES		MODELS			
		LA CROSSE C1150	LA CROSSE C1650	LA CROSSE C2150	LA CROSSE CA90
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"	*86 1/4" - 45 3/8" - 45 1/4"	*63 5/8" - 45 3/8" - 45 1/4"
Inches-MM	MM	*1190 - 1152- 1150	*1690 - 1152 - 1150	*2190 - 1152 - 1150	*1616- 1152 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"	70" - 53 7/8" - 55 1/8"
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2368 - 1370 - 1400	1778 - 1370 - 1400
Humidity Control	---	35-70%	35-70%	35-70%	35-70%
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	14°C / 58°F	14°C / 58°F	14°C / 58°F	14°C / 58°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +35°F Evap Temperature	BTU'S	1300 BTU'S	1900 BTU'S	2400 BTU'S	2600 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)
Power Consumption	(W/A)	420W / 2.5A	650W / 4A	850W / 4.5A	1050W / 6A
Defrost	Mode/Type	Electric	Electric	Electric	Electric
Climatic Class	N°/°C/°F/H.R.	3/25/77/60%	3/25/77/60%	3/25/77/60%	3/25/77/60%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs	535Kgs / 1179Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



STANDARD: CHOCOLATE

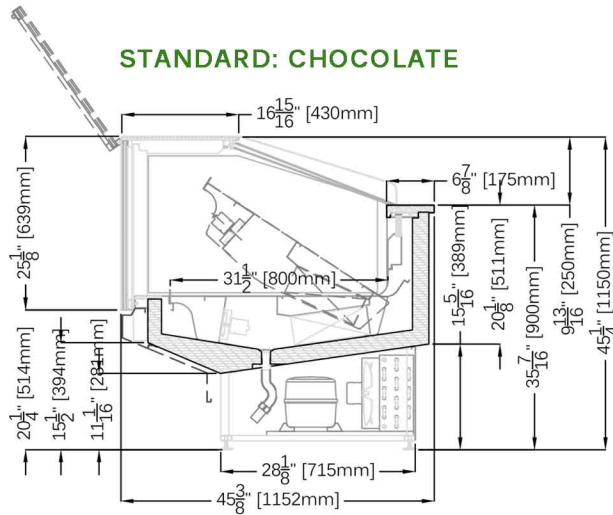


OPTIONAL: NARROW DEPTH

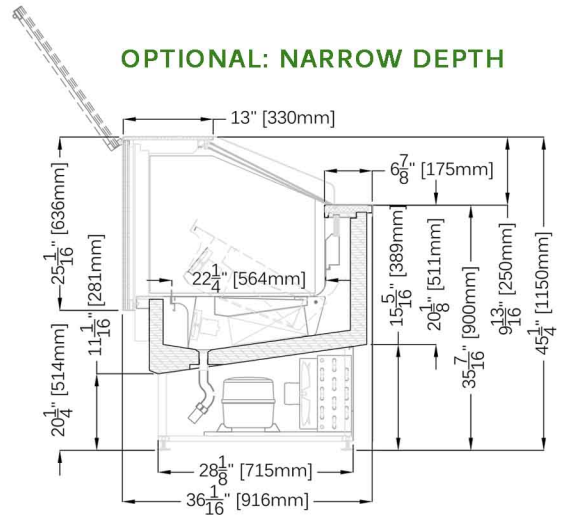


PLAN VIEWS: LA CROSSE C1150, LA CROSSE C1650, LA CROSSE C2150, LA CROSSE CA90

LA CROSSE LINEAR MODELS

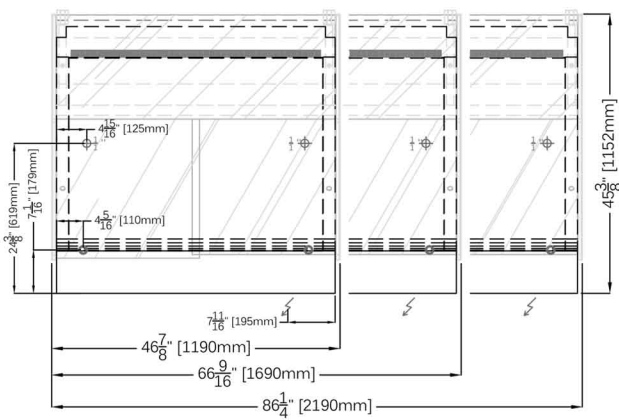


LA CROSSE CA90

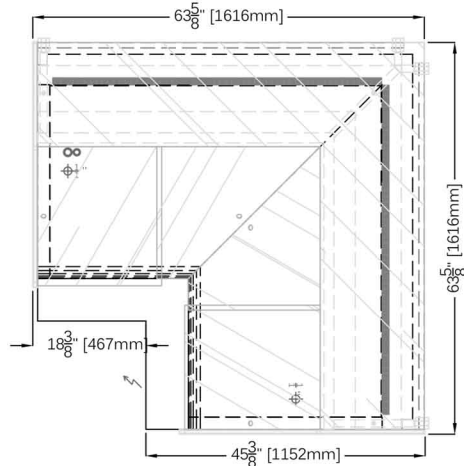


REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE C1150, LA CROSSE C1650, LA CROSSE C2150, LA CROSSE CA90

LA CROSSE LINEAR MODELS

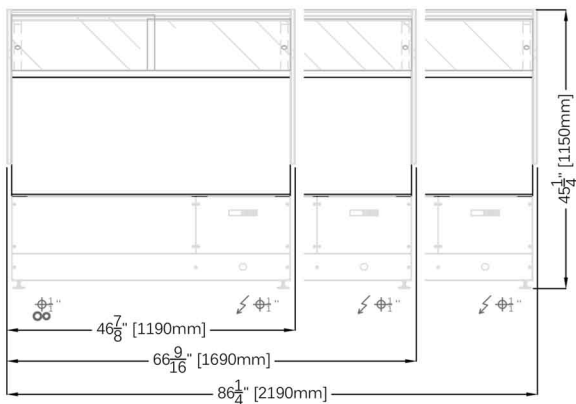

LA CROSSE CA90

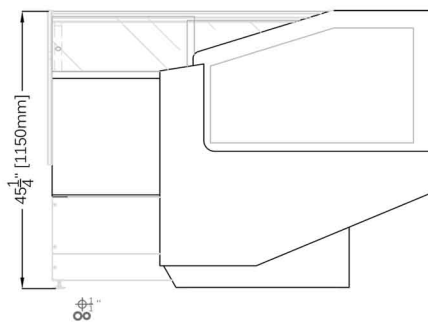

ELECTRICAL LEGEND

∞	REFRIGERATED LINES
⊕"	DRAIN
⚡	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

- Double pane lift-up front glass
- Double pane sides
- Lift-up deck to allow the perfect cleaning of the tank
- Diffused LED lighting 3000°K
- Plexiglass sliding doors
- Cases ship standard unfinished

OPTIONS

- Bumper addition for cart/trolley
- Rolling curtain
- Paper holder
- Pull-out faucet inside the tank
- Cutting board with knives pocket
- Scale holder
- Intermediate shelf
- RAL color/laminate front and side panels
- Casters



LA CROSSE NEUTRAL					
TECHNICAL FEATURES		MODELS			
		LA CROSSE N1150	LA CROSSE N1650	LA CROSSE N2150	LA CROSSE NA90
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"	*86 1/4" - 45 3/8" - 45 1/4"	*63 5/8" - 45 3/8" - 45 1/4"
Inches-MM	MM	*1190 - 1152 - 1150	*1690 - 1152 - 1150	*2190 - 1152 - 1150	*1616 - 1152 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"	70" - 53 7/8" - 55 1/8"
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2368 - 1370 - 1400	1778 - 1370 - 1400
Electric Supply	(V/Ph/Hz)	230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)
		120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)
Power Consumption	(A)	2A	2A	3A	3A
Operating Temperature	Type	Ambient	Ambient	Ambient	Ambient
Net Weights	Kg/Lb	175Kgs / 385Lbs	270Kgs / 594Lbs	310Kgs / 682Lbs	330Kgs / 726Lbs
Crated Weights	Kg/Lb	220Kgs / 445Lbs	290Kgs / 640Lbs	340Kgs / 750Lbs	380Kgs / 835Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com



STANDARD: NEUTRAL

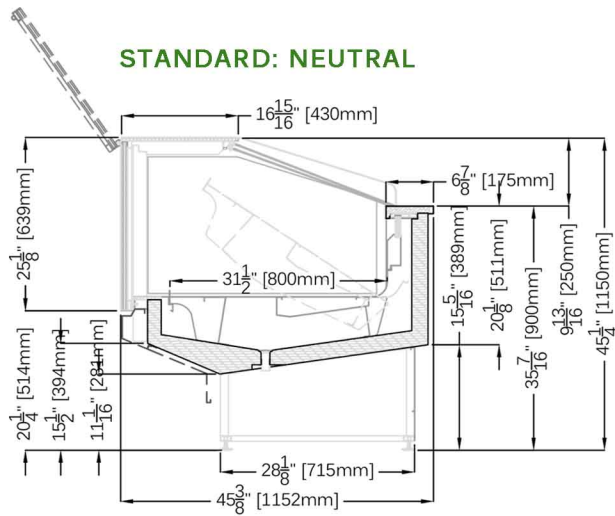


OPTIONAL: NARROW DEPTH

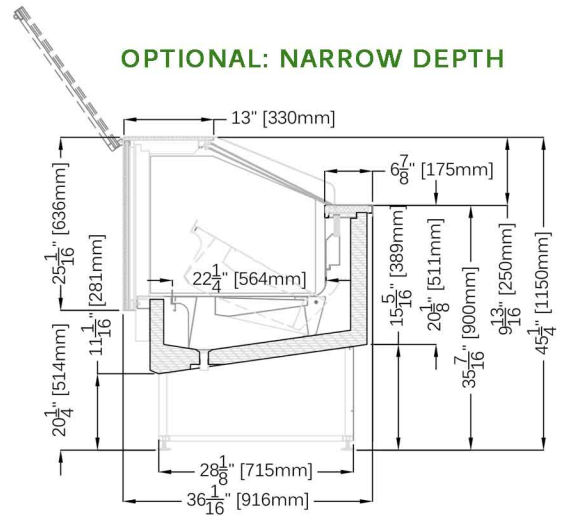


PLAN VIEWS: LA CROSSE N1150, LA CROSSE N1650, LA CROSSE N2150, LA CROSSE NA90

LA CROSSE LINEAR MODELS

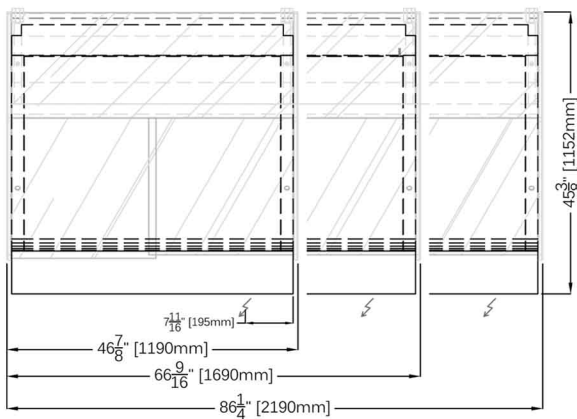


LA CROSSE NA90

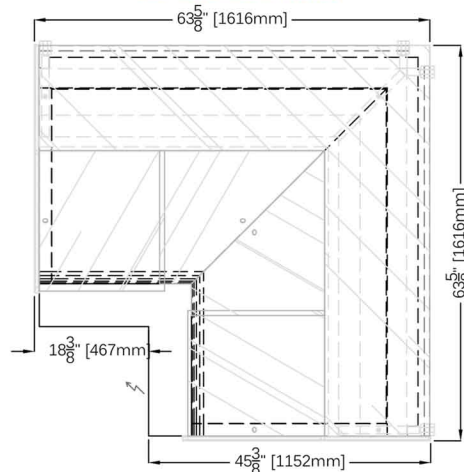


REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE N1150, LA CROSSE N1650, LA CROSSE N2150, LA CROSSE NA90

LA CROSSE LINEAR MODELS

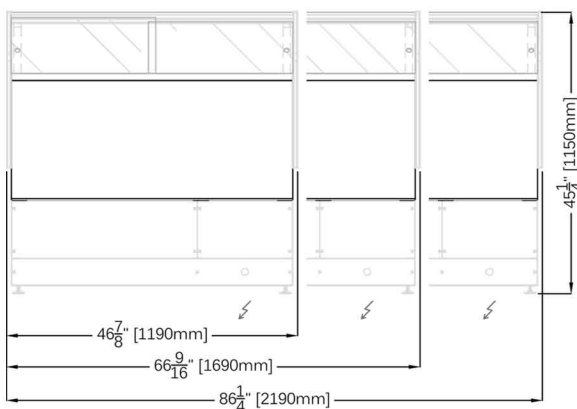

LA CROSSE NA90

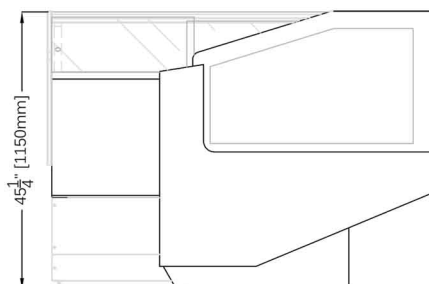

ELECTRICAL LEGEND

 POWER


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

Double pane lift-up front glass
Double pane sides
Heat lamp
Plexiglass sliding doors
CS - dry heated plate
CBM - bain marie hot wells
Cases ship standard unfinished

OPTIONS

Bumper addition for cart/trolley
Rolling curtain
Paper holder
Pull-out faucet inside the tank
Cutting board with knives pocket
Scale holder
Intermediate shelf
RAL color/laminate front and side panels
Casters

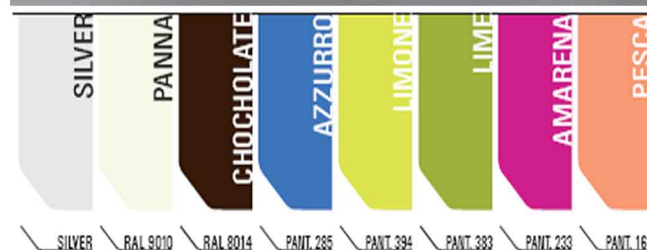

LA CROSSE HOT (CS - DRY)			
TECHNICAL FEATURES		MODELS	
		LA CROSSE CS1150	LA CROSSE CS1650
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"
Inches-MM	MM	*1190 - 1152 - 1150	*1690 - 1152 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400
Power Supply**	(V/PH/HZ)	208-220V/1Ph/60Hz (2)	208-220V/1Ph/60Hz (2)
Power Amps	HEAT LAMP (V/A)	208-220V/2.5A	208-220V/3.5A
Direct Connection**	HOT PLATE (V/A)	120V/6.7A - NEMA 5-15P	120V/9.3A - NEMA 5-15P
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS

** REQUIRES (2) INDEPENDENT POWER SUPPLY

LA CROSSE HOT (CBM - BAIN MARIE)			
TECHNICAL FEATURES		MODELS	
		LA CROSSE CBM1150	LA CROSSE CBM1650
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"
Inches-MM	MM	*1190 - 1152 - 1150	*1690 - 1152 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400
Power Supply**	(V/PH/HZ)	208-220V/1Ph/60Hz (2)	208-220V/1Ph/60Hz (2)
Power Amps	HEAT LAMP (V/A)	208-220V/2.5A	208-220V/3.5A
Direct Connection**	BAIN MARIE (V/A)	208-220V/11.6 A	208-220V/17.4A
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS



** REQUIRES (2) INDEPENDENT POWER SUPPLY

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.





361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



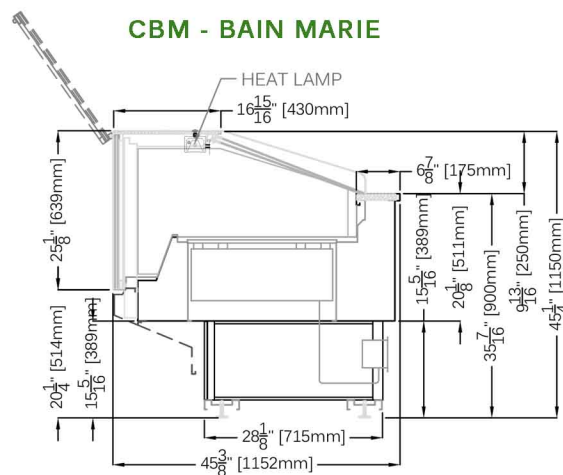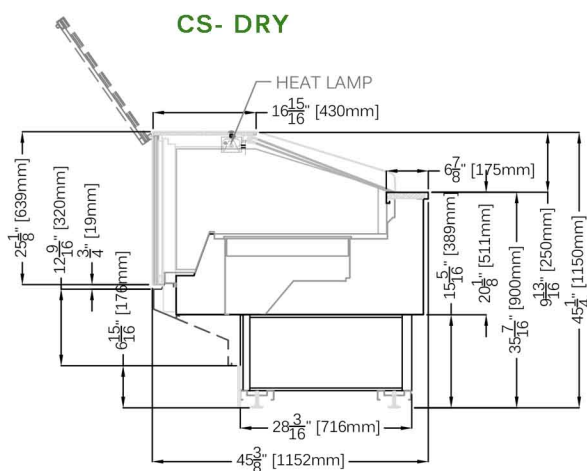


CS-DRY

PLAN VIEWS: LA CROSSE CS1150, LA CROSSE CS1650

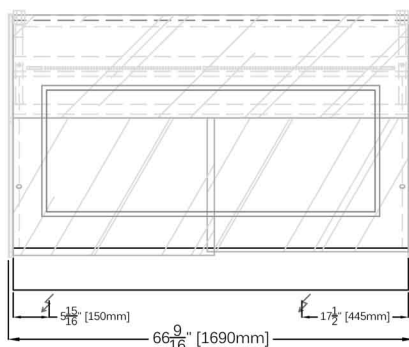



REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE CS1150, LA CROSSE CS1650





* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

CBM - BAIN MARIE

PLAN VIEWS: LA CROSSE CBM1150, LA CROSSE CBM1650

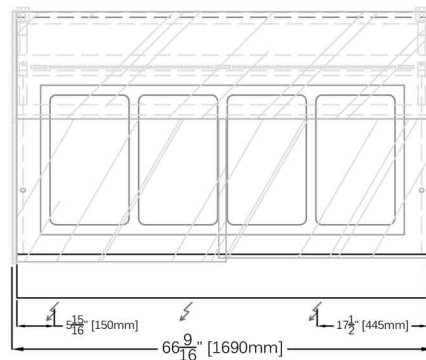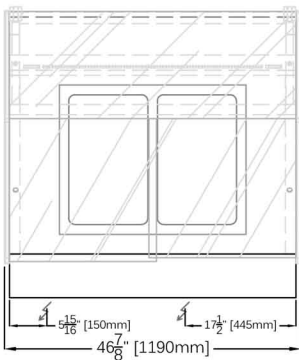

REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE CBM1150, LA CROSSE CBM1650

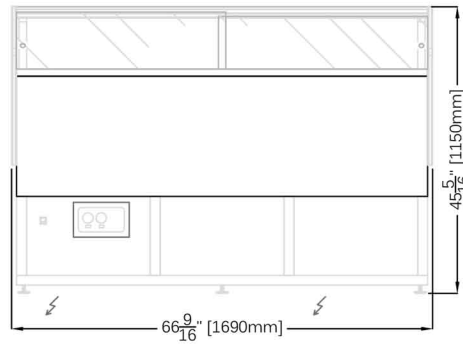

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

Double pane sides
Lift-up deck and evaporator to allow the perfect cleaning of the tank (self serve A1 models)
Internal condensing unit except A2 A90
Cases ship standard unfinished

OPTIONS

Bumper addition for cart/trolley
Paper holder
Pull-out faucet inside the tank
Cutting board with knives pocket
Scale holder
External condensing unit
RAL color/laminate front and side panels
Casters



LA CROSSE SELF SERVE A1 (SELF CONTAINED)					
TECHNICAL FEATURES		MODELS			
		LA CROSSE SS A1 1150	LA CROSSE SS A1 1650	LA CROSSE SS A1 2150	LA CROSSE SS A1 A90
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 37 5/16"	*66 9/16" - 45 3/8" - 37 5/16"	*86 1/4" - 45 3/8" - 37 5/16"	*63 5/8" - 45 3/8" - 37 5/16"
Inches-MM	MM	*1190 - 1152 - 948	*1690 - 1152 - 948	*2190 - 1152 - 948	*1615 - 1152 - 948
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 43 1/8"	73 5/8" - 53 7/8" - 43 1/8"	93 1/4" - 53 7/8" - 43 1/8"	70 7/8" - 53 7/8" - 43 1/8"
Inches-MM	MM	1370 - 1370 - 1094	1870 - 1370 - 1094	2368 - 1370 - 1094	1800 - 1370 - 1094
Refrigerated Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°F	41°F	41°F	41°F	41°F
Compressor	Nr./Type	Hermetic	Hermetic	Hermetic	Hermetic
BTU'S @ +14°F Evap Temperature	BTU'S	3900 BTU'S	4600 BTU'S	5200 BTU'S	6800 BTU'S
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(A)	10A	12A	14A	14A
Defrost	Mode/Type	Electric	Electric	Electric	Electric
Climatic Class	N°/°C/°F/H.R.	3/24/77/55%	3/24/77/55%	3/24/77/55%	3/24/77/55%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	150Kgs / 330Lbs	240Kgs / 528Lbs	290Kgs / 638Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	175Kgs / 384Lbs	250Kgs / 550Lbs	340Kgs / 750Lbs	485Kgs / 1000Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




LA CROSSE SELF SERVE A2 (REMOTE)					
TECHNICAL FEATURES		MODELS			
		LA CROSSE SS A2 1150	LA CROSSE SS A2 1650	LA CROSSE SS A2 2150	LA CROSSE SS A2 A90
External Dimensions (L-D-H)	Inches	*46 7/8" - 40 13/16" - 34 5/8	*66 9/16" - 40 13/16" - 34 5/8	*86 1/4" - 40 13/16" - 34 5/8	*64 15/16" - 40 13/16" - 34 5/8"
Inches-MM	MM	*1190 - 1036 - 880	*1690 - 1036 - 880	*2190 - 1036 - 880	*1650 - 1036 - 880
Crated Dimensions (L-D-H)	Inches	53 7/8" - 46" - 40"	73 5/8" - 46" - 40"	93 1/4" - 46" - 40"	70 7/8" - 46" - 40"
Inches-MM	MM	1370 - 1168 - 1016	1870 - 1168 - 1016	2368 - 1168 - 1016	1800 - 1168 - 1016
Refrigerated Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°F	41°F	41°F	41°F	41°F
Compressor	Nr./Type	Hermetic	Hermetic	Hermetic	Hermetic
BTU'S @ +14°F Evap Temperature	BTU'S	5680 BTU'S	6520 BTU'S	7210 BTU'S	8500 BTU'S
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption (Remote)	(A)	2A	3A	4A	5A
Defrost	Mode/Type	Electric	Electric	Electric	Electric
Climatic Class	N°/C/F°/H.R.	3/24/77/55%	3/24/77/55%	3/24/77/55%	3/24/77/55%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	150Kgs / 330Lbs	240Kgs / 528Lbs	290Kgs / 638Lbs	390Kgs / 850Lbs
Crated Weights	Kg/Lb	175Kgs / 384Lbs	250Kgs / 550Lbs	340Kgs / 750Lbs	535Kgs / 1179Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS


SELF SERVE A1 - SELF CONTAINED

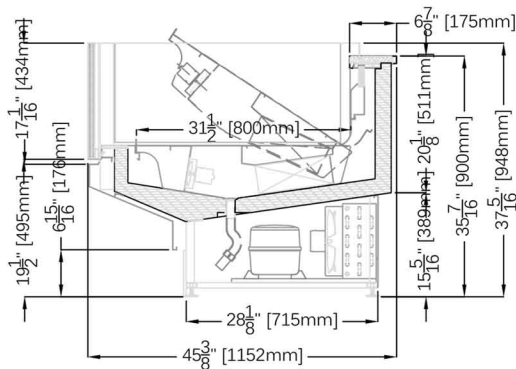

SELF SERVE A2 - REMOTE

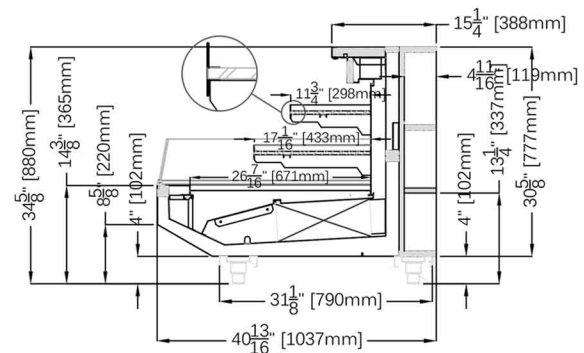

OPTIONAL - NARROW DEPTH

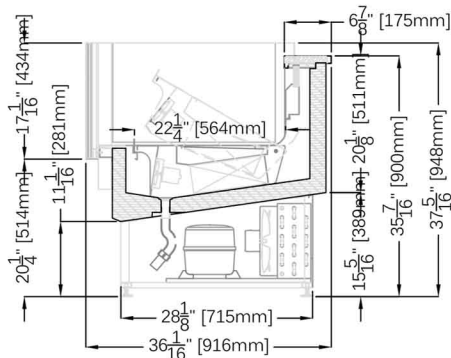


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.


SELF SERVE A1 - SELF CONTAINED

PLAN VIEWS: LA CROSSE SS A1 1150, LA CROSSE SS A1 1650, LA CROSSE SS A1 2150, LA CROSSE SS A1 A90

SELF SERVE A1 - LINEAR MODELS

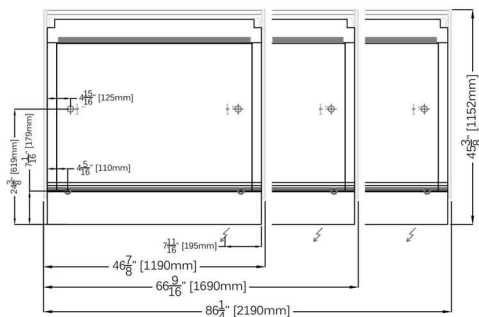


SELF SERVE A1 A90

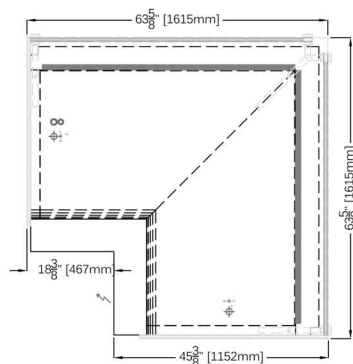


REAR ELEVATIONS (OPERATOR SIDE):

LA CROSSE SS A1 1150, LA CROSSE SS A1 1650, LA CROSSE SS A1 2150, LA CROSSE SS A1 A90

SELF SERVE A1 - LINEAR MODELS

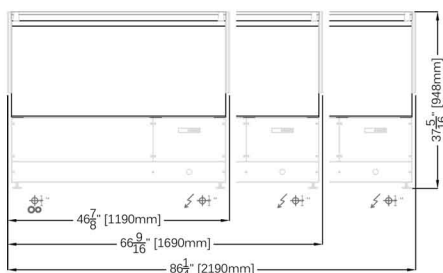

SELF SERVE A1 A90



ELECTRICAL LEGEND

	REFRIGERATED LINES
	DRAIN
	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com




SELF SERVE A2 - REMOTE

PLAN VIEWS: LA CROSSE SS A2 1150, LA CROSSE SS A2 1650, LA CROSSE SS A2 2150, LA CROSSE SS A2 A90

SELF SERVE A2 - LINEAR MODELS

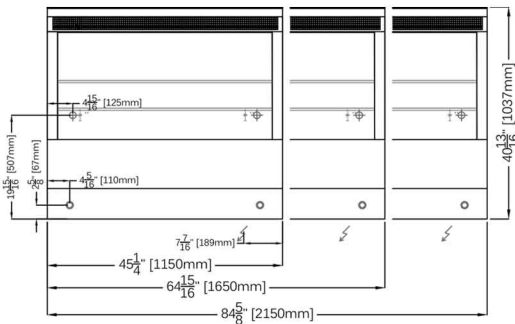


SELF SERVE A2 A90

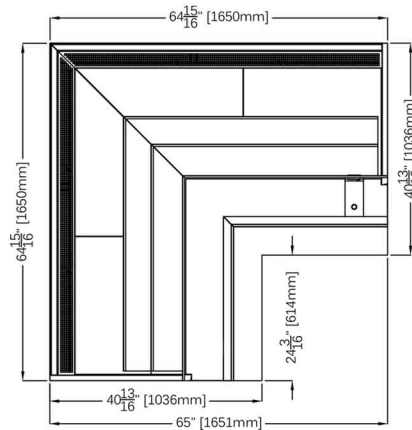


REAR ELEVATIONS (OPERATOR SIDE):

LA CROSSE SS A2 1150, LA CROSSE SS A2 1650, LA CROSSE SS A2 2150, LA CROSSE SS A2 A90

SELF SERVE A2 - LINEAR MODELS

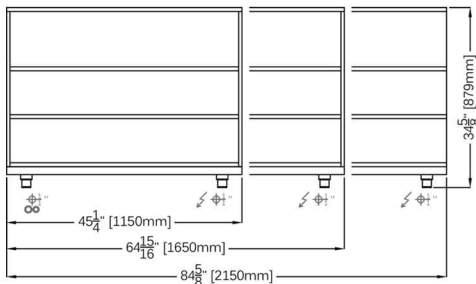

SELF SERVE A2 A90

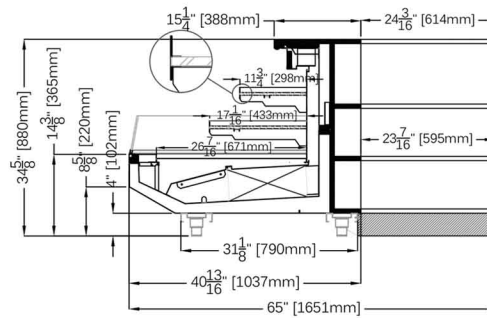

ELECTRICAL LEGEND

∞	REFRIGERATED LINES
⌀ 1"	DRAIN
⚡	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

Double pane side glass ends
Dixell digital control
Diffused LED lighting 3000°K on each shelf and canopy
Straight or inclined shelves
Bottom evaporator ventilation cooling
Stainless steel foam in place bottom and top
Adjustable feet
Cases ship standard unfinished

OPTIONS

Stainless steel side panels in lieu of glass
Shelf fence for inclined position
Black interior
Remote/water cooled condensing unit
RAL color/laminate front and side panels
Condensate pan
Casters



LA CROSSE COMBI				
TECHNICAL FEATURES		MODELS		
		LA CROSSE COMBI 1150	LA CROSSE COMBI 1650	LA CROSSE COMBI 2150
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 52 9/16"	*66 9/16" - 45 3/8" - 52 9/16"	*86 1/4" - 45 3/8" - 52 9/16"
Inches-MM	MM	*1190 - 1152 - 1335	*1690 - 1152 - 1335	*2190 - 1152 - 1335
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 58"	73 5/8" - 53 7/8" - 58"	93 1/4" - 53 7/8" - 58"
Inches-MM	MM	1370 - 1370 - 1473	1870 - 1370 - 1473	2368 - 1370 - 1473
BTU's @ +14°F Evap				
Temperature	BTU'S	4600 BTU'S	5320 BTU'S	6650 BTU'S
Power Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60
Amperage	(A)	4A	6A	7A
Operating Temperature	°F	40°F	40°F	40°F
Net Weights	Kg/Lb	130Kgs / 286Lbs	200Kgs / 440Lbs	240Kgs / 528Lbs
Crated Weights	Kg/Lb	145Kgs / 319Lbs	220Kgs / 484Lbs	255Kgs / 561Lbs


* DIMENSIONS ARE WITHOUT SIDE PANELS

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



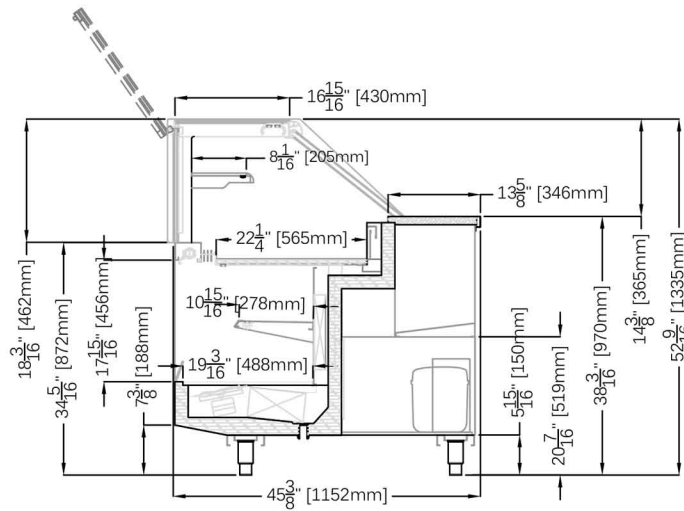

PLAN VIEWS: LA CROSSE COMBI 1150, LA CROSSE COMBI 1650, LA CROSSE COMBI 2150

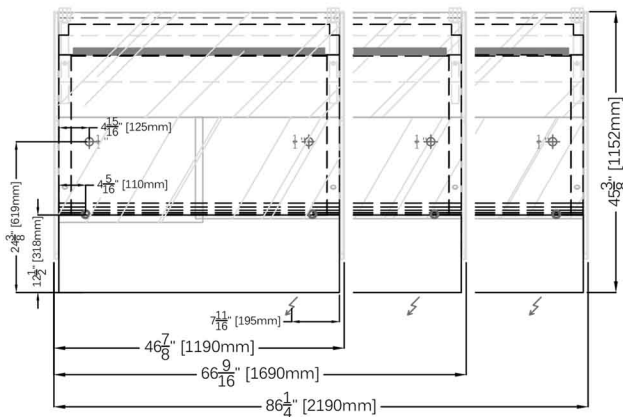

ELECTRICAL LEGEND



∞	REFRIGERATED LINES
Φ	DRAIN
$\swarrow$	POWER

REAR ELEVATIONS (OPERATOR SIDE):

LA CROSSE COMBI 1150, LA CROSSE COMBI 1650, LA CROSSE COMBI 2150

FRONT ELEVATIONS (CUSTOMER SIDE):

LA CROSSE COMBI 1150, LA CROSSE COMBI 1650, LA CROSSE COMBI 2150

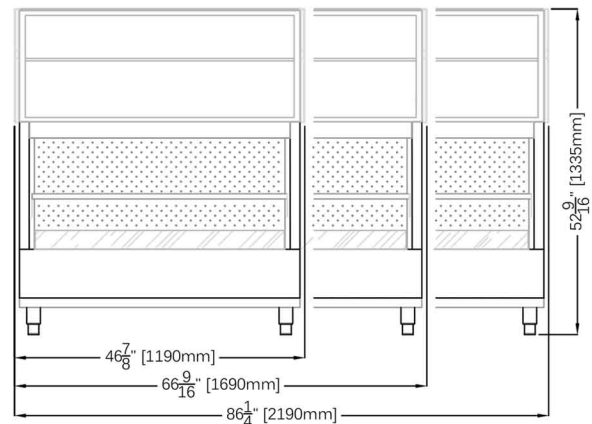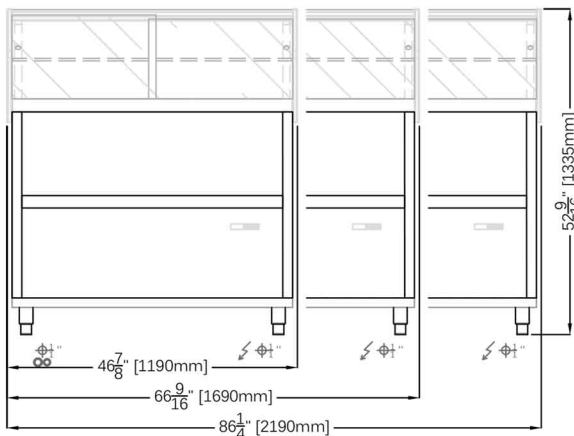

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com



STANDARD FEATURES

Electronic thermostatic TXV for high humidity
Double pane lift-up front glass
Double pane sides
Lift-up deck and evaporator to allow the perfect cleaning of the tank
Diffused LED lighting 3000°K
Plexiglass sliding doors
Internal condensing unit
Cases ship standard unfinished

OPTIONS

Narrow depth: 36 1/16"D
Bumper addition for cart/trolley
Rolling curtain
Paper holder
Pull-out faucet inside the tank
Cutting board with knives pocket
Scale holder
External condensing unit
Intermediate shelf
RAL color/laminate front and side panels
Casters



LA CROSSE RED MEAT					
TECHNICAL FEATURES		MODELS			
		LA CROSSE RM1150	LA CROSSE RM1650	LA CROSSE RM2150	LA CROSSE RMA90
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"	*86 1/4" - 45 3/8" - 45 1/4"	*63 5/8" - 45 3/8" - 45 1/4"
Inches-MM	MM	*1190 - 1152 - 1150	*1690 - 1152 - 1150	*2190 - 1152 - 1150	*1616 - 1152 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"	70" - 53 7/8" - 55 1/8"
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2368 - 1370 - 1400	1778 - 1370 - 1400
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	2°C / 35°F	2°C / 35°F	2°C / 35°F	2°C / 35°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU's @ +14°F Evap Temperature	BTU's	2400 BTU'S	3330 BTU'S	3625 BTU'S	5200 BTU'S
Electric Supply	(V/Ph/Hz)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)
Power Consumption	(W/A)	420W / 2.5A	650W / 4A	850W / 4.5A	1050W / 6A
Defrost	Mode/Type	Electric	Electric	Electric	Electric
Climatic Class	N°/°C/°F°H.R.	3/25/77/60%	3/25/77/60%	3/25/77/60%	3/25/77/60%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs	535Kgs / 1179Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



STANDARD: RED MEAT

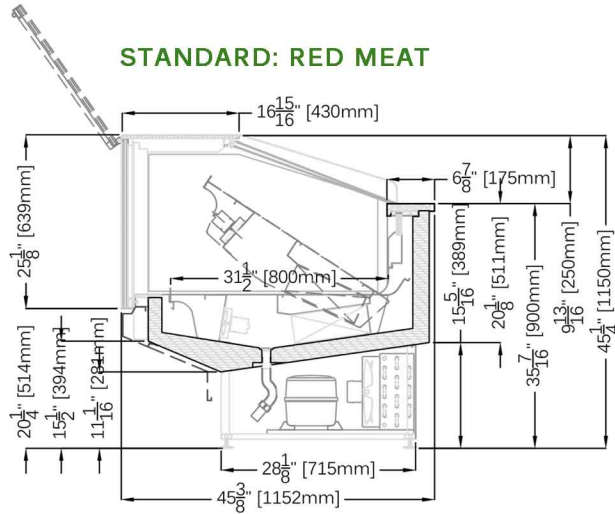


OPTIONAL: NARROW DEPTH

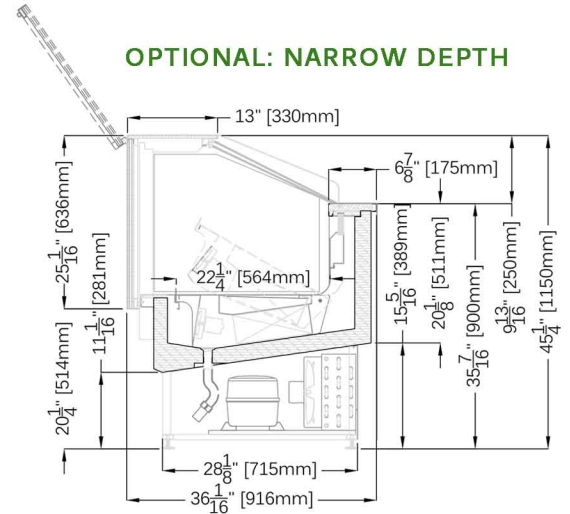


PLAN VIEWS: LA CROSSE RM1150, LA CROSSE RM1650, LA CROSSE RM2150, LA CROSSE RMA90

LA CROSSE LINEAR MODELS

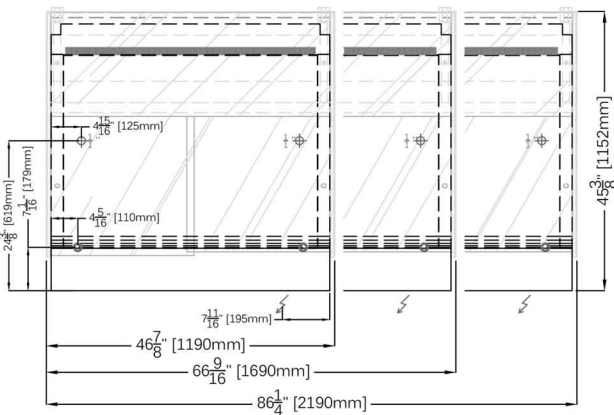


LA CROSSE RMA90

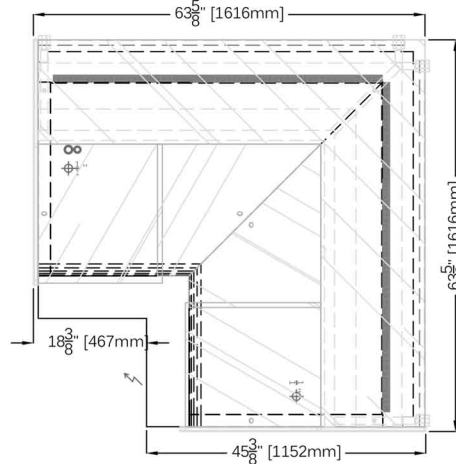


REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE RM1150, LA CROSSE RM1650, LA CROSSE RM2150, LA CROSSE RMA90

LA CROSSE LINEAR MODELS

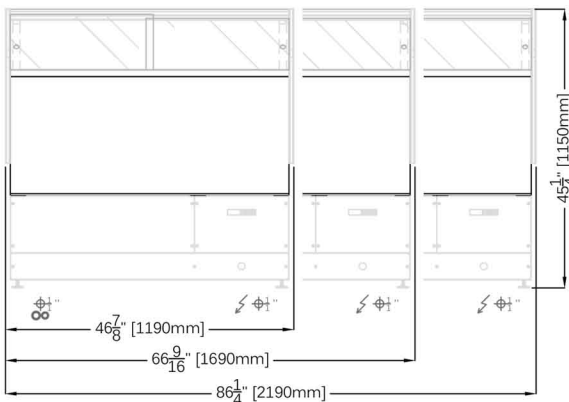

LA CROSSE RMA90

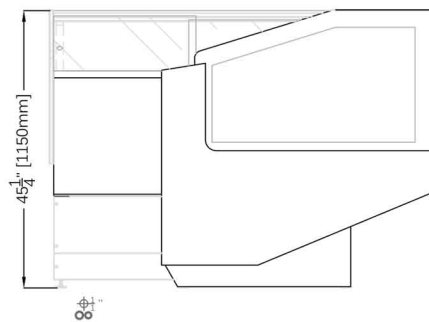

ELECTRICAL LEGEND

∞	REFRIGERATED LINES
⊕ 1/2"	DRAIN
⚡	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

- Double pane lift-up front glass
- Double pane side glasses
- Stainless steel cold wall static cooling insulated bin to retain ice
- Insulated stainless steel interior and exterior
- Built in drain for cleaning
- Diffused LED lighting 3000°K
- Plexiglas sliding doors
- Floor sink is required
- Cases ship standard unfinished

OPTIONS

- Roll down curtain
- Paper holder
- Scale holder
- RAL color/laminate front and side panels
- Casters



LA CROSSE FISH						
TECHNICAL FEATURES		MODELS				
		LA CROSSE F1150	LA CROSSE F1650	LA CROSSE F2150	LA CROSSE FA90	
External Dimensions (L-D-H)	Inches	*46 7/8" - 45 3/8" - 45 1/4"	*66 9/16" - 45 3/8" - 45 1/4"	*86 1/4" - 45 3/8" - 45 1/4"	*63 5/8" - 45 3/8" - 45 1/4"	
Inches-MM	MM	*1190 - 1152 - 1150	*1690 - 1152 - 1150	*2190 - 1152 - 1150	*1616 - 1152 - 1150	
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"	70" - 53 7/8" - 55 1/8"	
Inches-MM	MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2368 - 1370 - 1400	1778 - 1370 - 1400	
Operating Temperature	°F	36°F	36°F	36°F	36°F	
BTU's @ +14°F Evap Temperature	BTU's	2400 BTU'S	3330 BTU'S	3625 BTU'S	5200 BTU'S	
Electric Supply	(V/Ph/Hz)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	
		120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	
Power Consumption	(W/A)	420W / 2.5A	650W / 4A	850W / 4.5A	1050W / 6A	
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs	340Kgs / 749Lbs	
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs	535Kgs / 1179Lbs	


* DIMENSIONS ARE WITHOUT SIDE PANELS

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com



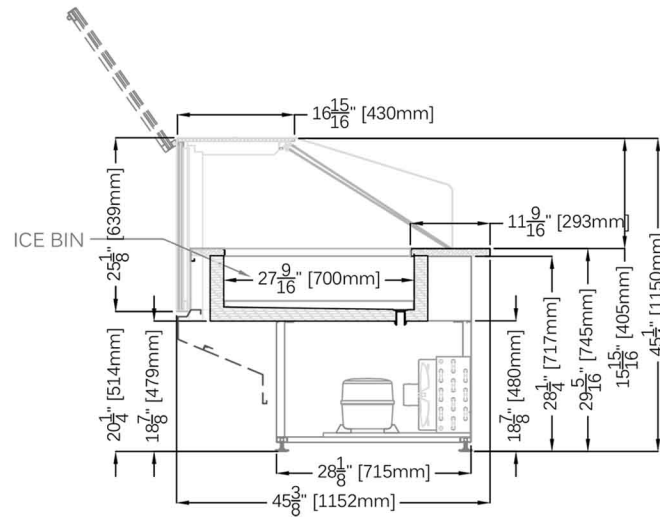


PLAN VIEWS: LA CROSSE F1150, LA CROSSE F1650, LA CROSSE F2150, LA CROSSE FA90

LA CROSSE LINEAR MODELS

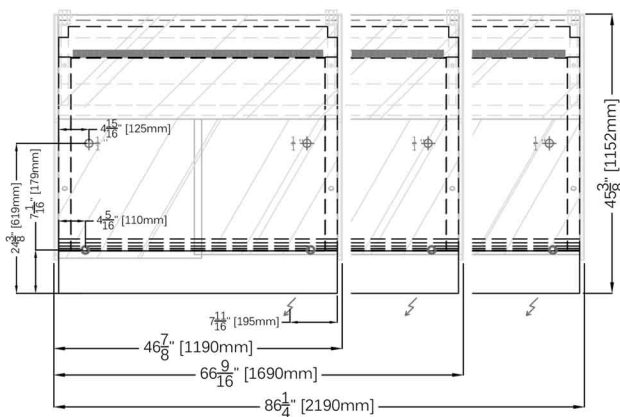


LA CROSSE FA90

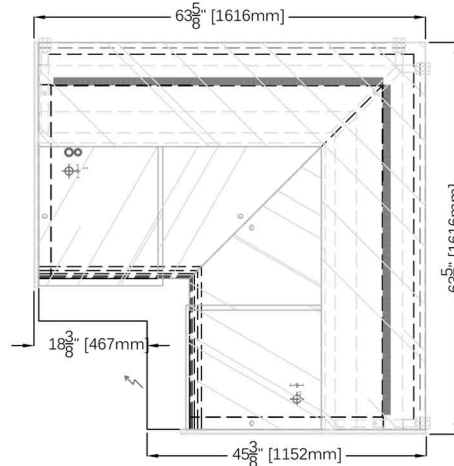


REAR ELEVATIONS (OPERATOR SIDE): LA CROSSE F1150, LA CROSSE F1650, LA CROSSE F2150, LA CROSSE FA90

LA CROSSE LINEAR MODELS

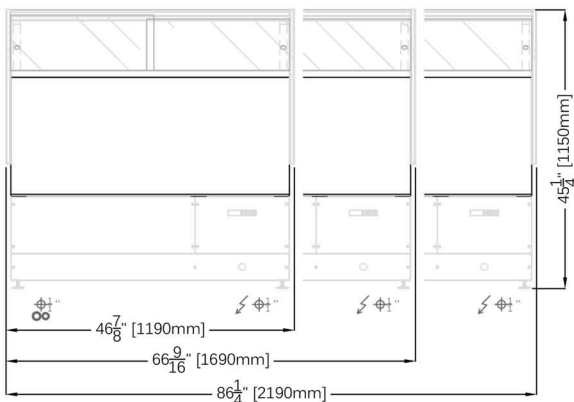

LA CROSSE FA90

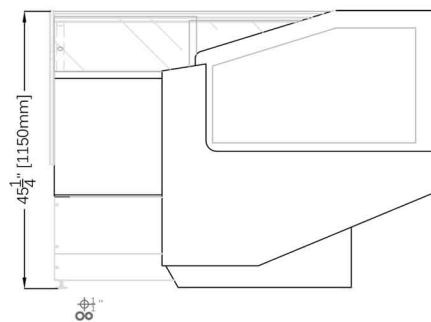

ELECTRICAL LEGEND

∞	REFRIGERATED LINES
⊕ 1/2"	DRAIN
⚡	POWER

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

