

POZZETTI/BPGL

Old Tradition display is back in style



This Old fashion style dipping case for Italian ice cream and Gelato has the newest and most updated technology. ETL approved for UL and NSF, high powdered interior fans to keep even temperature. Rounded body interior on corners and all stainless construction; this Pozzetti Gelato case is truly one of a kind and a real attraction in any location.



Discover the Art of Display...

POZZETTI/BPGL PHOTOS



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



Discover the Art of Display...



Pozzetti cases seamlessly combined with stainless steel exterior.

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)



Example of custom stone finish. For full selection see our Materials Brochure.

Project Name: _____

Item #: _____ Quantity: _____

POZZETTI BPGL WITH STORAGE

REMOTE MODELS:

POZZETTI/BPGL PSR4, PSR6, PSR8, PSR10

SELF-CONTAINED MODELS:

POZZETTI/BPGL PS4, PS6, PS8, PS10

STANDARD FEATURES

- Energy efficient air cooled condensing unit
- One piece molded body using 3 ' ecologic polyurethane insulation
- High performance
- Fan assisted with equalized temperature
- embedded coil and thermostatic valve
- Climate class 4 (+86°F/55% R.H.)
- AISI304 stainless steel external finish top and back stainless steel interior
- Ecological polyurethane foam insulation
- Stainless steel scotch brite adjustable feet ,
- gray steel frame support
- Digital control panel
- Flexibile arrangement that can be multiplexed and customized to fit customer layout
- 240oz. stainless steel container; Stainless steel cylindrical containers dim. 0 7 1/2" -9 3/4" H.
- Approximately 7 liters
- Cases ship standard unfinished

OPTIONS

- Sneeze guard
- Ventilated refrigeration
- Fan ventilated refrigeration system to equalized temperature inside the cabinet
- Condensing unit
- Water cooled condensing system
- Remote condensing unit
- Electric heated condensate pan
- Custom front and side paneling
- Stainless steel scoop washer with fixed water tap
- Reinforced wood crate
- Casters

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400


sales@oscartek.com | www.oscartek.com






REMOTE MODELS: POZZETTI/BPGL PSR4, PSR6, PSR8, PSR10


SELF-CONTAINED MODELS: POZZETTI/BPGL PS4, PS6, PS8, PS10

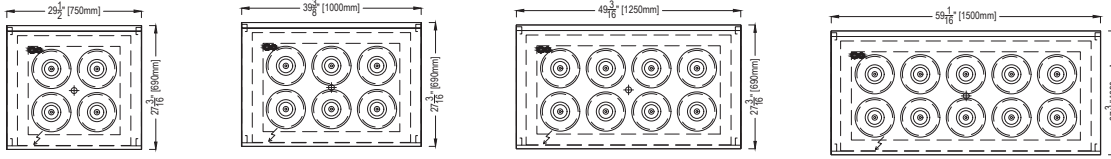POZZETTI/BPGL REMOTE
PLAN VIEWS




ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER


POZZETTI/BPGL SELF-CONTAINED
PLAN VIEWS

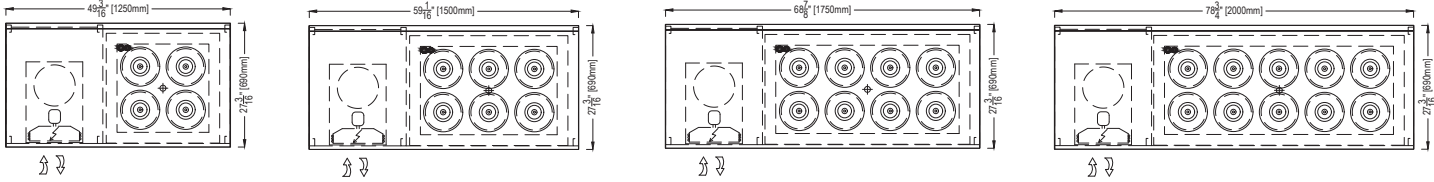

POZZETTI/BPGL REMOTE
REAR ELEVATION VIEWS

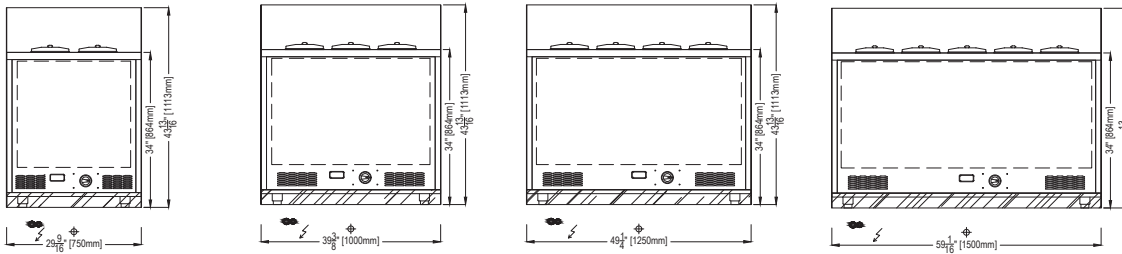

POZZETTI/BPGL SELF-CONTAINED
REAR ELEVATION VIEWS

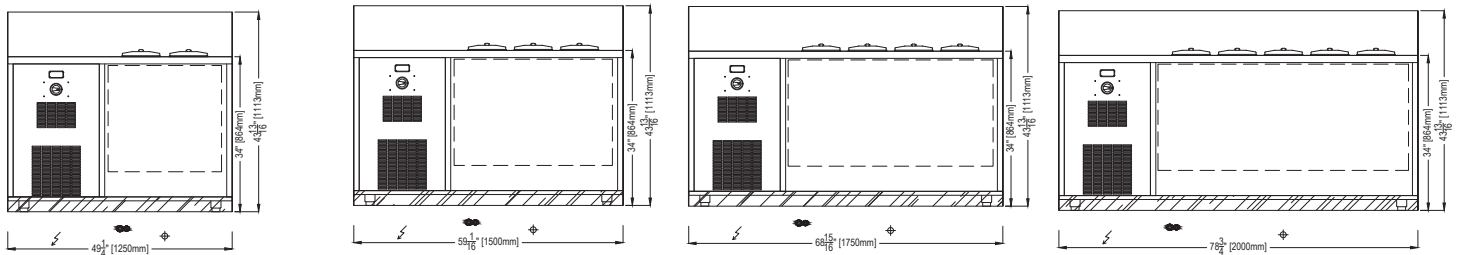


*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

REMOTE MODELS: POZZETTI/BPGL PSR4, PSR6, PSR8, PSR10
SELF-CONTAINED MODELS: POZZETTI/BPGL PS4, PS6, PS8, PS10

POZZETTI/BPGL
SECTION VIEWS

STANDARD

**OPTIONAL:
SNEEZE GUARD**

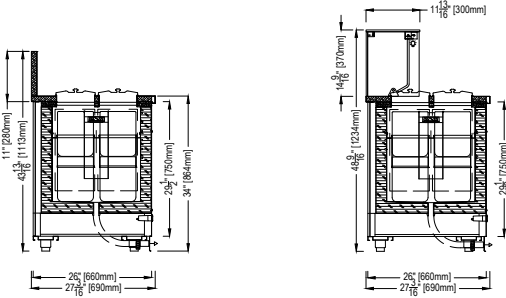

POZZETTI/BPGL WITH STORAGE (REMOTE)					
TECHNICAL FEATURES		MODELS			
Model Name		POZZETTI/BPGL PSR4	POZZETTI/BPGL PSR6	POZZETTI/BPGL PSR8	POZZETTI/BPGL PSR10
External Dimensions (L-D-H)	Inches	*29 9/16" - 27 3/16" - 43 13/16"	*39 3/8" - 27 3/16" - 43 13/16"	*49 1/4" - 27 3/16" - 43 13/16"	*59 1/16" - 27 3/16" - 43 13/16"
	Inches-MM	*750 - 690 - 1113	*1000 - 690 - 1113	*1250 - 690 - 1113	*1500 - 690 - 1113
Crated Dimensions (L-D-H)	Inches	25" - 31" - 50"	25" - 31" - 50"	25" - 31" - 50"	25" - 31" - 50"
	Inches-MM	635 - 787 - 1270	635 - 787 - 1270	635 - 787 - 1270	635 - 787 - 1270
Refrigeration	Type	Static/ Ventilated	Static/ Ventilated	Static/ Ventilated	Static/ Ventilated
Number of Containers (240 oz.)	#	4	6	8	10
Operating Temperature	°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F
Condensing Units	#	1	1	1	1
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ -25°F Evap Temperature	BTU	1280	2048	2528	3200
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(A)	5.2	7.3	7.5	7.7
Defrost	Mode/Type	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle
Climatic Class	Rating	4	4	4	4
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Lb	260	330	420	510
Crated Weights	Lb	460	570	690	760

*DIMENSIONS WITH POLISHED S/S SIDES

POZZETTI/BPGL WITH STORAGE (SELF-CONTAINED)					
TECHNICAL FEATURES		MODELS			
Model Name		POZZETTI/BPGL PS4	POZZETTI/BPGL PS6	POZZETTI/BPGL PS8	POZZETTI/BPGL PS10
External Dimensions (L-D-H)	Inches	*49 3/16" - 27 3/16" - 43 13/16"	*59 1/16" - 27 3/16" - 43 13/16"	*68 7/8" - 27 3/16" - 43 13/16"	*78 3/4" - 27 3/16" - 43 13/16"
	Inches-MM	*1250 - 690 - 1113	*1500 - 690 - 1113	*1750 - 690 - 1113	*2000 - 690 - 1113
Crated Dimensions (L-D-H)	Inches	55" - 31" - 50"	65" - 31" - 50"	71" - 31" - 50"	85" - 31" - 50"
	Inches-MM	1397 - 787 - 1270	1651 - 787 - 1270	1803 - 787 - 1270	2159 - 787 - 1270
Refrigeration	Type	Static/ Ventilated	Static/ Ventilated	Static/ Ventilated	Static/ Ventilated
Number of Containers (240 oz.)	#	4	6	8	10
Operating Temperature	°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F
Condensing Units	#	1	1	1	1
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ -25°F Evap Temperature	BTU	1280	2048	2528	3200
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(A)	5.2	7.3	7.5	7.7
Defrost	Mode/Type	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle
Climatic Class	Rating	4	4	4	4
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Lb	330	420	510	610
Crated Weights	Lb	570	690	760	880

*DIMENSIONS WITH POLISHED S/S SIDES

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com





Discover the Art of Display...



Pozzetti cases seamlessly combined with custom finish exterior.

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)



Example of custom stone finish. For full selection see our Materials Brochure.

Project Name: _____

Item #: _____ Quantity: _____

POZZETTI BPGL WITHOUT STORAGE

MODELS:

POZZETTI/BPGL P2, P4, P6, P8, P10

STANDARD FEATURES

- Energy efficient air cooled condensing unit
- One piece molded body using 3' ecologic polyurethane insulation
- High performance Static refrigeration with embedded coil and thermostatic valve
- Climate class 4 (+86 ° F/55% R.H.)
- AISI304 stainless steel external finish top and back stainless interior
- Ecological polyurethane foam insulation
- Stainless steel scotch brite adjustable feet,
- gray steel frame support
- Digital control panel
- Flexible arrangement can be multiplexed and customized to fit customer layout
- 240oz. stainless steel container; Stainless steel cylindrical containers dim. 0 71/2"-9 3/4"H Approximately 7 liters
- Cases ship standard unfinished

OPTIONS

- Sneeze guard
- Condensing unit
- Water cooled condensing system
- Remote condensing unit
- Electric heated condensate pan
- Custom front and side paneling
- Stainless steel scoop washer with fixed water tap
- Reinforced wood crate
- Casters

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400


sales@oscartek.com | www.oscartek.com






Discover the Art of Display...


MODELS: POZZETTI/BPGL P2, P4, P6, P8, P10

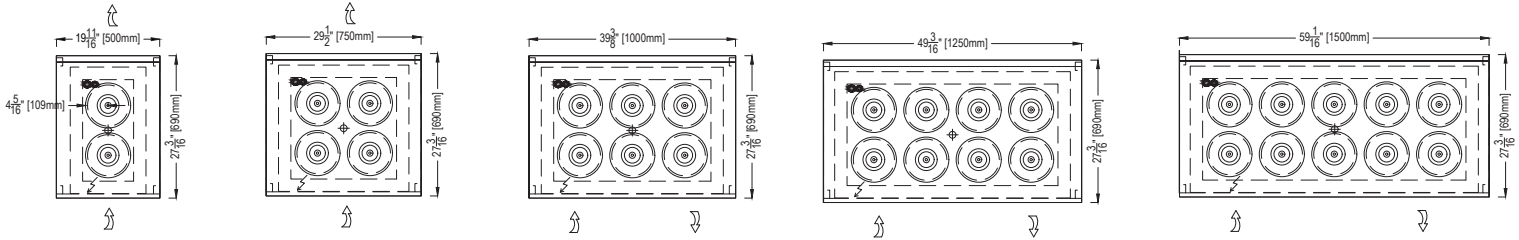**POZZETTI/BPGL
PLAN VIEWS**



ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

**POZZETTI/BPGL
REAR ELEVATION VIEWS**

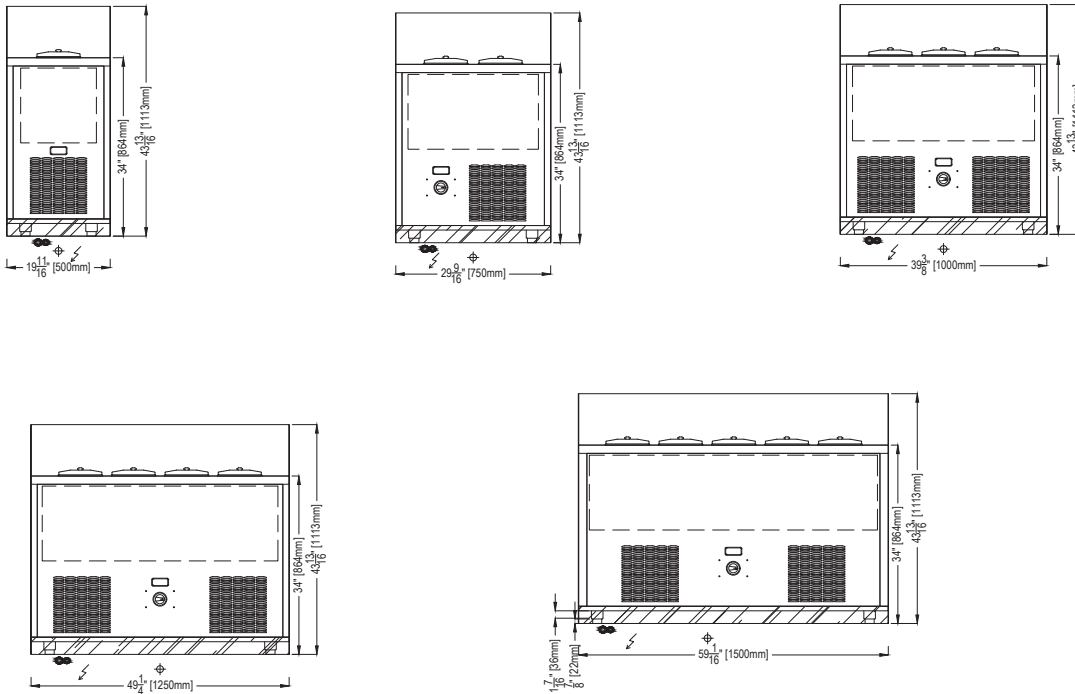

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com





MODELS: POZZETTI/BPGL P2, P4, P6, P8, P10

**POZZETTI/BPGL
SECTION VIEWS**

STANDARD

**OPTIONAL:
SNEEZE GUARD**

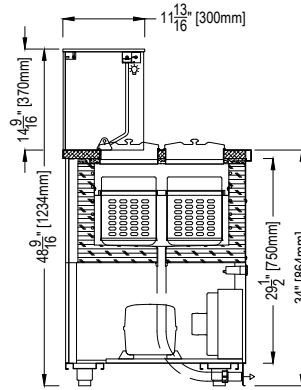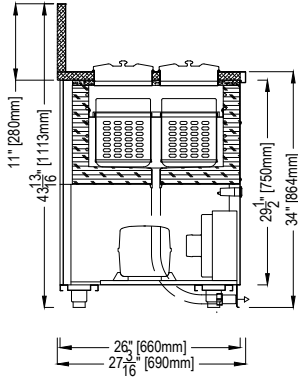

POZZETTI/BPGL WITHOUT STORAGE

TECHNICAL FEATURES		MODELS				
Model Name		POZZETTI/BPGL P2	POZZETTI/BPGL P4	POZZETTI/BPGL P6	POZZETTI/BPGL P8	POZZETTI/BPGL P10
External Dimensions (L-D-H)	Inches	*19 11/16" - 27 3/16" - 43 13/16"	*29 9/16" - 27 3/16" - 43 13/16"	*39 3/8" - 27 3/16" - 43 13/16"	*49 1/4" - 27 3/16" - 43 13/16"	*59 1/16" - 27 3/16" - 43 13/16"
	Inches-MM	*500 - 690 - 1113	*750 - 690 - 1113	*1000 - 690 - 1113	*1250 - 690 - 1113	*1500 - 690 - 1113
Crated Dimensions (L-D-H)	Inches	25" - 31" - 50"	25" - 31" - 50"	25" - 31" - 50"	25" - 31" - 50"	25" - 31" - 50"
	Inches-MM	635 - 787 - 1270	635 - 787 - 1270	635 - 787 - 1270	635 - 787 - 1270	635 - 787 - 1270
Refrigeration	Type	Static	Static	Static	Static	Static
Number of Containers (240 oz.)	#	2	4	6	8	10
Operating Temperature	°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F
Condensing Units	#	1	1	1	1	1
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ -25°F Evap Temperature	BTU	832	1280	2048	2528	3200
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(A)	5.1	5.2	7.3	7.5	7.7
Defrost	Mode/Type	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle
Climatic Class	Rating	4	4	4	4	4
Refrigerant Gas	Type	R404A	R404A	R404A	R404A	R404A
Net Weights	Lb	200	260	330	420	510
Crated Weights	Lb	350	460	570	690	760

*DIMENSIONS WITH POLISHED S/S SIDES

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

