MURO H78

Self serve with style

This pleasant one of a kind Grab N Go is made specifically to fit into any application, tying service cases with style. It is has different lengths and just like the entire Oscartek™ line it can be customized to fit any décor.

OSCARTEK®

Discover the Art of Display...

512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

ISO 9001 QUALITY ASSURANCE

OSCARTEK
Discover the Art of Display...

Project Name:_____
Item #:_____ Quantity:_____

Photos shown with standard glass sides and optional solid sides. Cases shown with standard polished stainless steel interior and exterior

Visit our website for more finishing options and RAL colors
www.oscartek.com

MURO H78
Self-Serve Air Screen Wall Refrigeration Showcase

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

STANDARD FEATURES

- Double pane glass ends
- Dixell digital control
- Diffused 3000°K LED lighting on each shelf and canopy
- Straight or inclined shelves
- Roll down curtain
- Bottom evaporator ventilation cooling
- Self-contained air cooled condensing unit
- Stainless steel foam in place bottom and top
- Adjustable feet
- Cases ship standard polished stainless steel interior and exterior

OPTIONS

- Top mount condensing unit
- Remote/water cooled condensing unit
- Solid sides: add 13/16” each side
- Roll down locking shutter with solid sides required: add 1 3/4" each side
- Sliding doors with solid sides required: add 13/16” each side
- Swing doors: available in glass sides and solid sides (add 13/16” each side)
- Joint Kit for multiplexing continuous line up
- Shelf fence for inclined position
- Tempered Glass shelves in lieu of stainless steel
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Cold or Dry Storage on Remote application
- Condensate evaporator pan with fan
- Casters
- Custom height Chassis modification
- Able to match to Provino wine, charcuterie, and Freezer

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

H78 Shown with optional Custom laminate and locking shutter

H78 Shown with optional Matching Provino Freezer Remote

H78 shown with optional Dry storage on Remote application

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

STANDARD: MURO H78 SELF SERVE – SELF CONTAINED

PLAN VIEWS

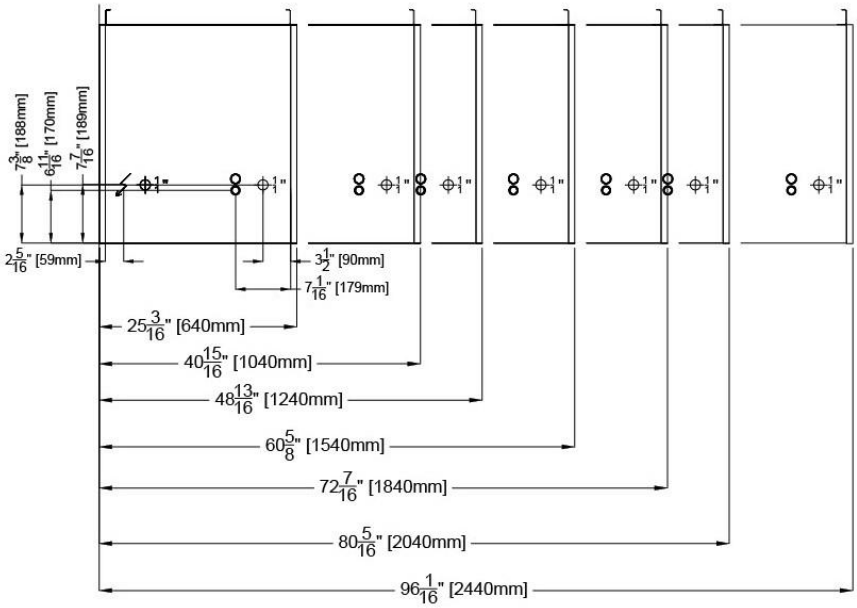

FRONT ELEVATIONS

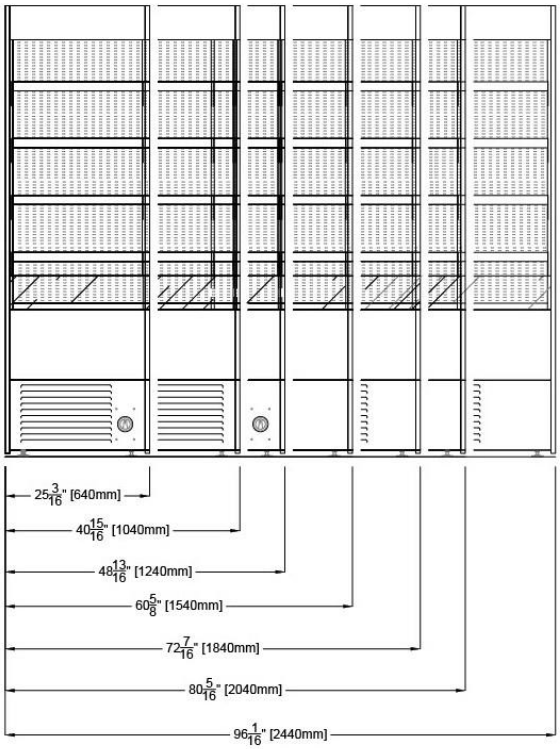

ELECTRICAL LEGEND	
∞	REFRIGERATION LINES
⌀1"	DRAIN
⚡	POWER

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

STANDARD: MURO H78 WITH GLASS SIDES

SECTION VIEWS

STANDARD:
SELF CONTAINED BOTTOM MOUNT CONDENSING UNIT

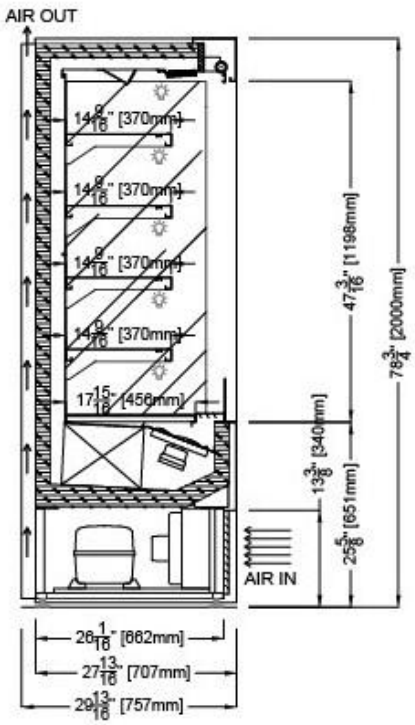

OPTIONAL:
SELF CONTAINED TOP MOUNT `CONDENSING UNIT

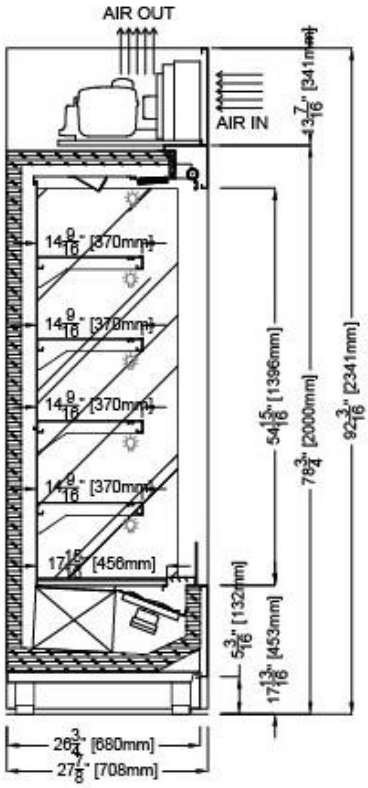

OPTIONAL:
REMOTE CONDENSING UNIT

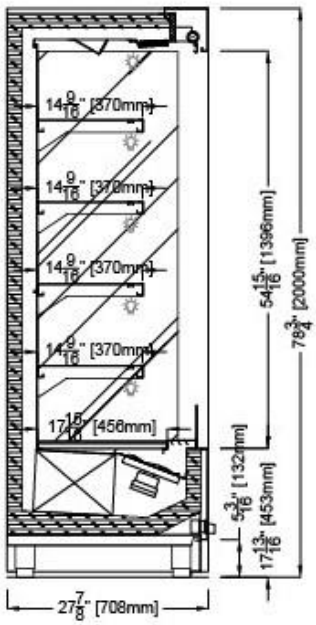

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

OPTIONALS: MURO H78 WITH SLIDING GLASS DOORS

SECTION VIEWS

OPTIONAL:
SELF CONTAINED BOTTOM MOUNT CONDENSING UNIT

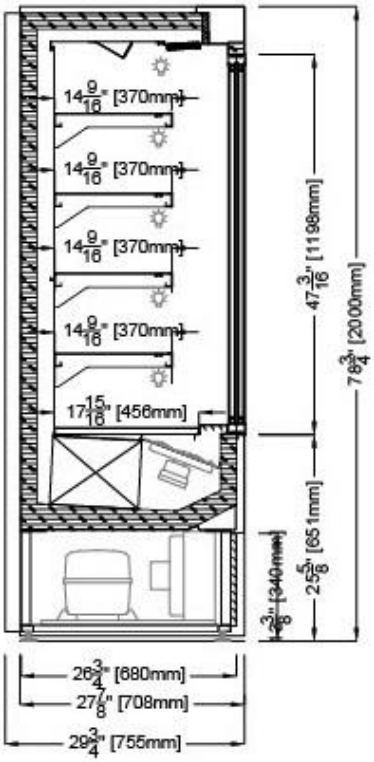

OPTIONAL:
SELF CONTAINED TOP MOUNT CONDENSING UNIT

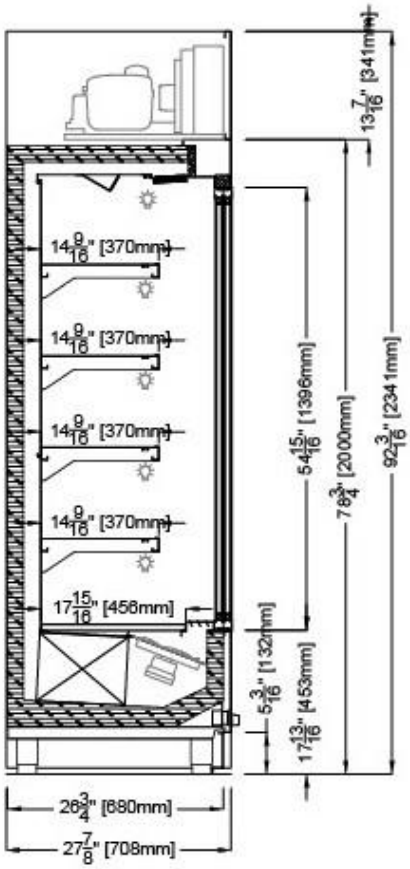

OPTIONAL:
REMOTE CONDENSING UNIT

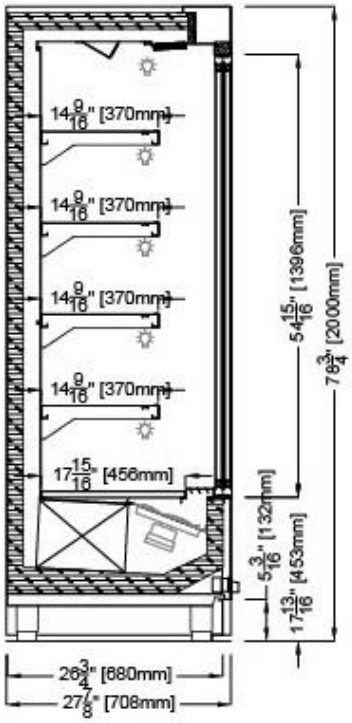

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

OPTIONALS: MURO H78 WITH SWING GLASS DOORS

SECTION VIEWS

OPTIONAL:
SELF CONTAINED BOTTOM MOUNT CONDENSING UNIT

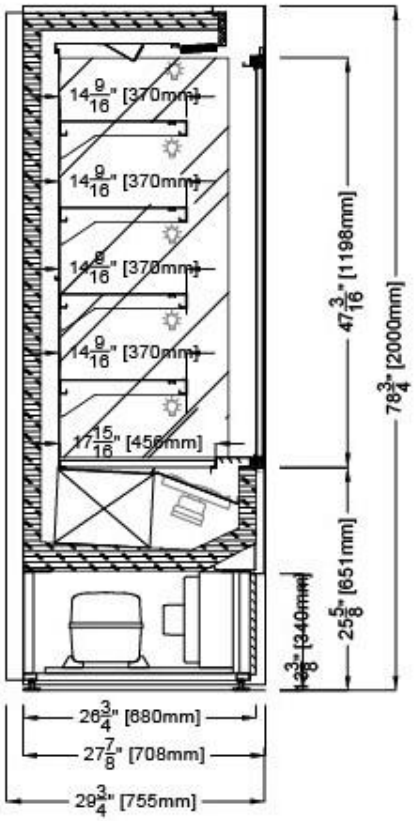

OPTIONAL:
SELF CONTAINED TOP MOUNT CONDENSING UNIT

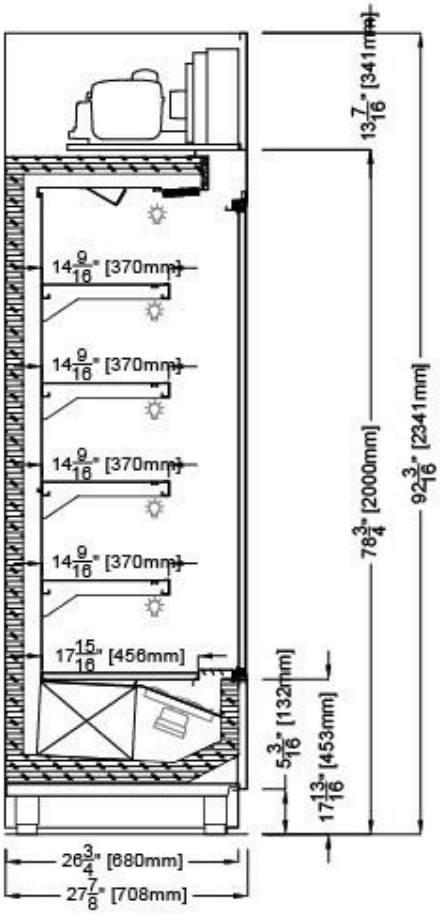

OPTIONAL:
REMOTE CONDENSING UNIT

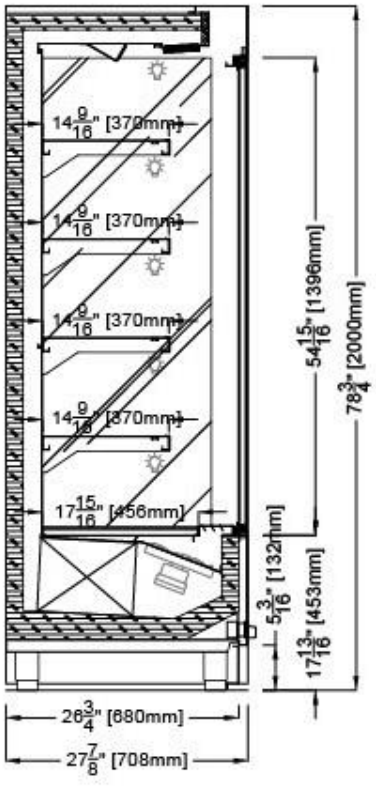

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

OPTIONALS: MURO H78 WITH ROLL DOWN SHUTTER

SECTION VIEWS

OPTIONAL:
SELF CONTAINED BOTTOM MOUNT CONDENSING UNIT

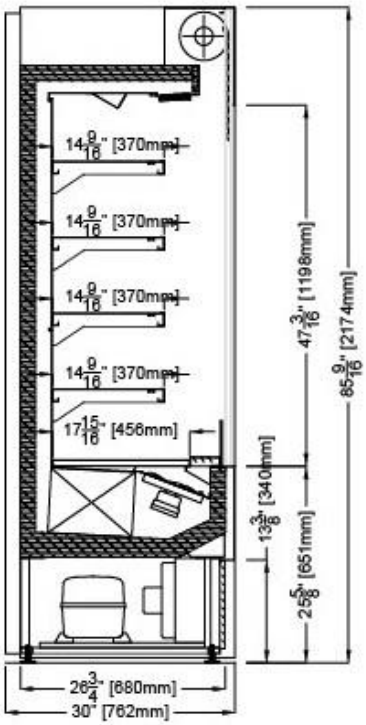

OPTIONAL:
SELF CONTAINED TOP MOUNT CONDENSING UNIT

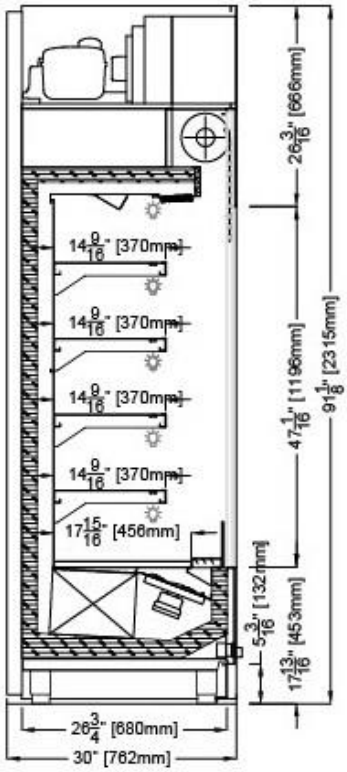

OPTIONAL:
REMOTE CONDENSING UNIT

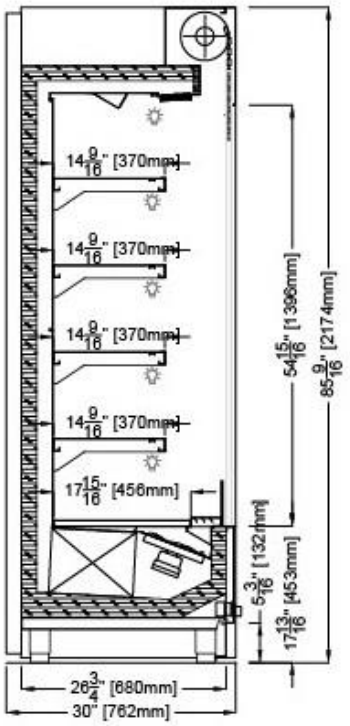

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

OSCARTEK
Discover the Art of Display...

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

MURO H78 SELF SERVE AIR SCREEN REFRIGERATION					
TECHNICAL FEATURES		**MODELS**			
		MURO H78 600 (MUROH78GS25)	**MURO H78 1000 (MUROH78GS41)**	**MURO H78 1200 (MUROH78GS49)**	**MURO H78 1500 (MUROH78GS61)**
External Dimensions (L-D-H) Inches-MM	Inches MM	*25 3/16" - 29 13/16"- 78 3/4" *640 - 757 - 2000	*40 15/16" - 29 13/16" - 78 3/4" *1040 - 757 - 2000	*48 13/16" - 29 13/16" - 78 3/4" *1240 - 757 - 2000	*60 5/8" - 29 13/16" - 78 3/4" *1540 - 757 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	31" - 36" - 85" 787 - 914 - 2160	46" - 36" - 85" 1168 - 914 - 2160	56" - 36" - 85" 1422 - 914 - 2160	67" - 36" - 85" 1701 - 914 - 2160
Operating Temperature	°F	40°F	40°F	40°F	40°F
Air Cooled Condensing Unit	---	1	1	1	1
BTU'S @ +10°F Expansion Temperature	**BTU'S	**6500	**7850	**8900	**10,200
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1450/6.9	1750/8.8	2100/11.5	2300/12.5
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 3/8" Liquid	5/8" Suction, 3/8" Liquid	3/4" Suction, 3/8" Liquid
Net Weights	Kg/Lb	350	510	595	730
Crated Weights	Kg/Lb	410	570	655	790
*DIMENSIONS ARE WITH STANDARD GLASS SIDES					
**ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT.					
NOTES: 1) 85°F AMBIENT AND 55% RELATIVE HUMIDITY | 2) FLOOR SINK RECOMMENDED ON THESE MODELS					

Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

OSCARTEK
Discover the Art of Display...

Project Name:_____
Item #:_____ Quantity:_____

MURO H78

MODELS: MURO H78 600, MURO H78 1000, MURO H78 1200, MURO H78 1500, MURO H78 1800, MURO H78 2000, MURO H78 2400

MURO H78 SELF SERVE AIR SCREEN REFRIGERATION				
TECHNICAL FEATURES		**MODELS**		
		MURO H78 1800 (MUROH78GS72)	**MURO H78 2000 (MUROH78GS80)**	**MURO H78 2400 (MUROH78GS96)**
External Dimensions (L-D-H) Inches-MM	Inches MM	*72 7/16" - 29 13/16" - 78 3/4" *1840 - 757 - 2000	*80 5/16" - 29 13/16" - 78 3/4" *2040 - 757 - 2000	*96 1/16" - 29 13/16" - 78 3/4" *2440 - 757 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	79" - 36" - 85" 2006 - 914 - 2160	87" - 36" - 85" 2209 - 914 - 2160	103" - 36" - 85" 2616 - 914 - 2160
Operating Temperature	°F	40°F	40°F	40°F
Air Cooled Condensing Unit	---	1	1	1
BTU'S @ +10°F Expansion Temperature	**BTU'S	**11,500	**13,600	**17,000
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	2500/14.5	(2) 1750/8.8	(2) 2100/11.5
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	3/4" Suction, 3/8" Liquid	(2) 5/8" Suction, 3/8" Liquid	(2) 5/8" Suction, 3/8" Liquid
Net Weights	Kg/Lb	840	950	1080
Crated Weights	Kg/Lb	900	1010	1140
*DIMENSIONS ARE WITH STANDARD GLASS SIDES				
**ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT.				
NOTES: 1) 85°F AMBIENT AND 55% RELATIVE HUMIDITY | 2) FLOOR SINK RECOMMENDED ON THESE MODELS				

Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO
Self-Serve Air Screen Wall Refrigeration Showcase

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

STANDARD FEATURES
- Remote condensing unit
- Double pane side glass ends
- Dixell digital control
- Diffused 3000°K LED lighting on each shelf and canopy
- Straight or inclined shelves
- Roll down curtain
- Bottom evaporator ventilation cooling
- Stainless steel foam in place bottom and top
- Adjustable feet
- Cases ship standard polished stainless steel interior and exterior

OPTIONS
- Bottom mount and top mount condensing unit available with sliding glass doors and swing glass doors only
- Remote/water cooled condensing unit
- Solid sides: add 13/16” each side
- Roll down locking shutter with solid sides required: add 1 3/4" each side
- Sliding doors with solid sides required: add 13/16” each side
- Swing doors: available in glass sides and solid sides (add 13/16” each side)
- Joint Kit for multiplexing continuous line up
- Shelf fence for inclined position
- Tempered Glass shelves in lieu of stainless steel
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Cold or Dry Storage on Remote application
- Condensate evaporator pan with fan
- Casters
- Custom height Chassis modification
- Able to match to Provino wine, charcuterie, and Freezer

Photos shown with optional wood finish exterior and black finish interior. Cases are standard polished stainless steel interior and exterior.

Visit our website for more finishing options and RAL colors
www.oscartek.com

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

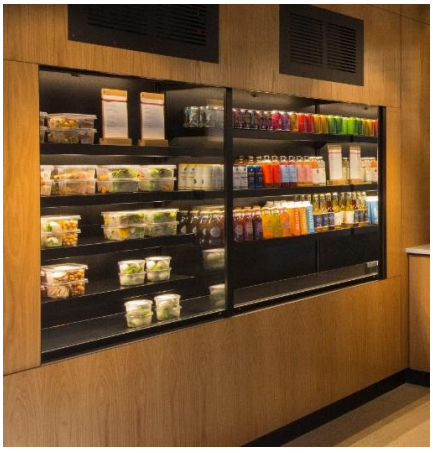

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

STANDARD: MURO H78 PRO SELF SERVE – REMOTE CONDENSING UNIT

PLAN VIEWS

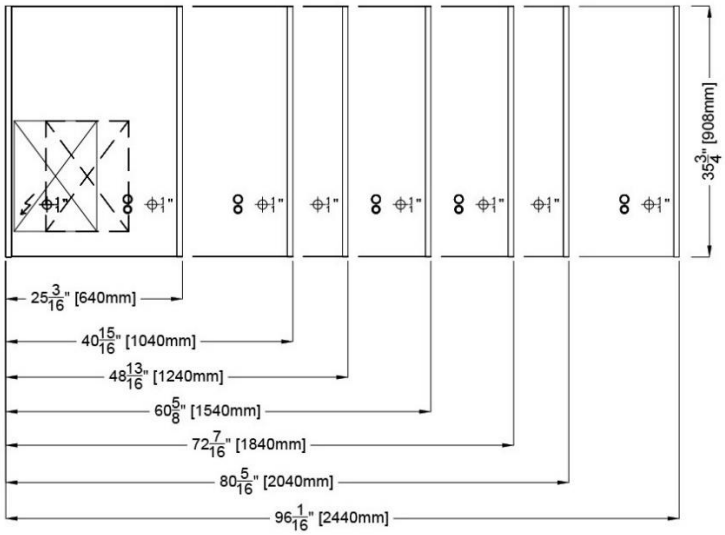

FRONT ELEVATIONS

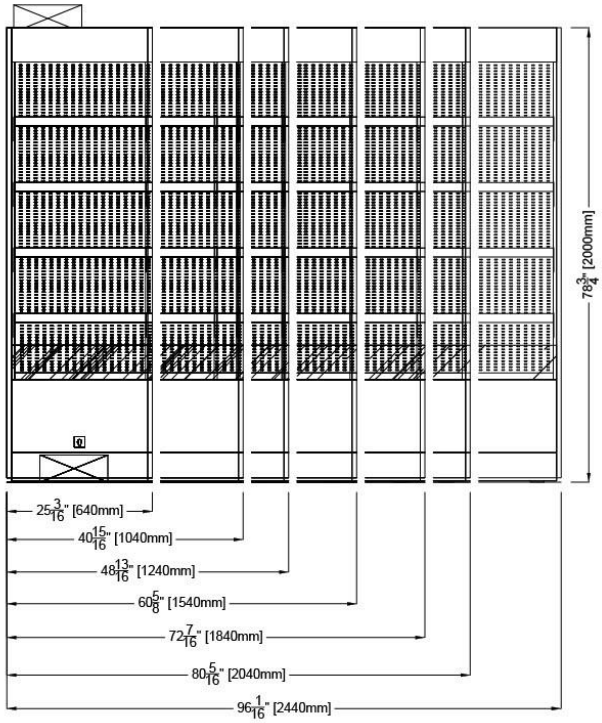

ELECTRICAL LEGEND	
oo	REFRIGERATION LINES
⌀1"	DRAIN
⚡	POWER

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

STANDARD: MURO H78 PRO WITH GLASS SIDES

SECTION VIEWS

STANDARD:
REMOTE CONDENSING UNIT

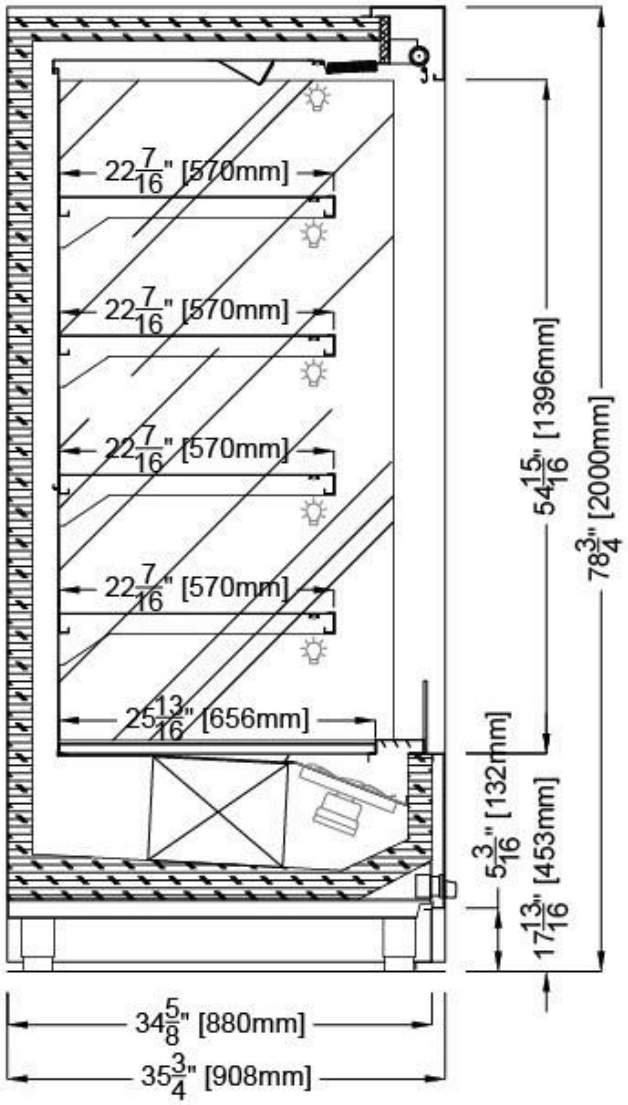

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

OPTIONALS: MURO H78 PRO WITH SLIDING GLASS DOORS

SECTION VIEWS

OPTIONAL:
SELF CONTAINED BOTTOM MOUNT CONDENSING UNIT

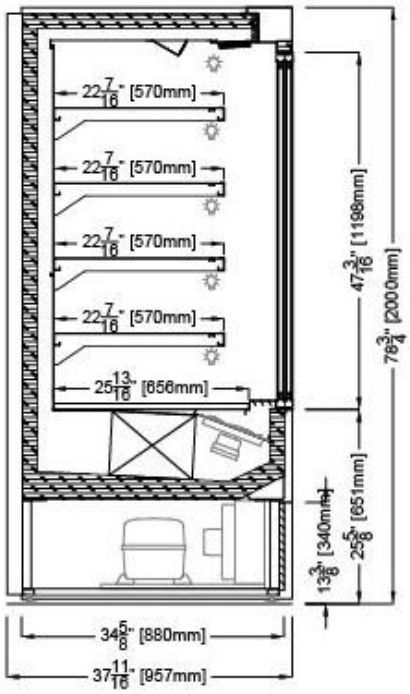

OPTIONAL:
SELF CONTAINED TOP MOUNT CONDENSING UNIT

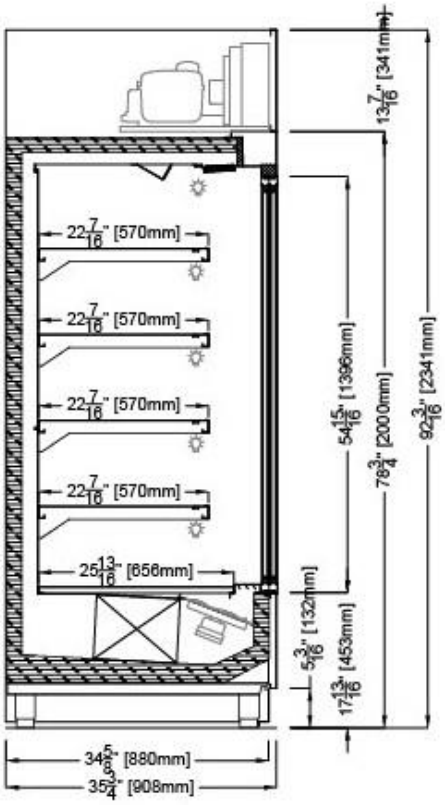

OPTIONAL:
REMOTE CONDENSING UNIT

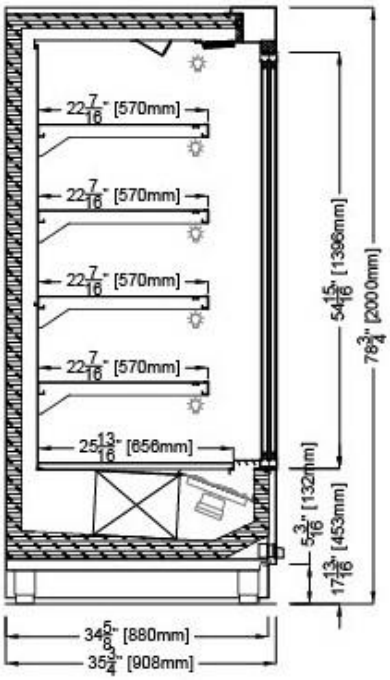

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

OPTIONALS: MURO H78 PRO WITH SWING GLASS DOORS

SECTION VIEWS

OPTIONAL:
SELF CONTAINED BOTTOM MOUNT CONDENSING UNIT

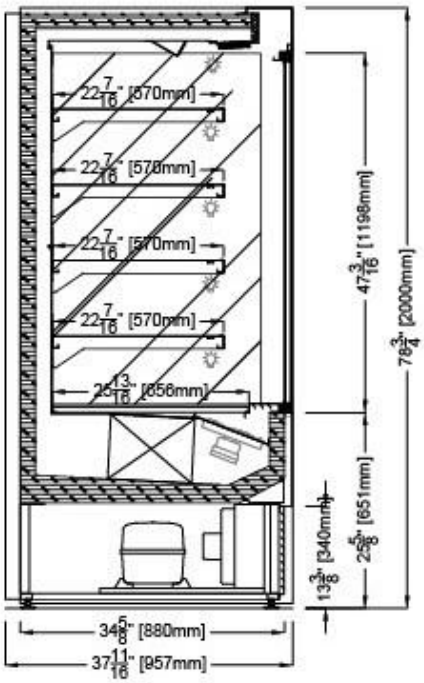

OPTIONAL:
SELF CONTAINED TOP MOUNT CONDENSING UNIT

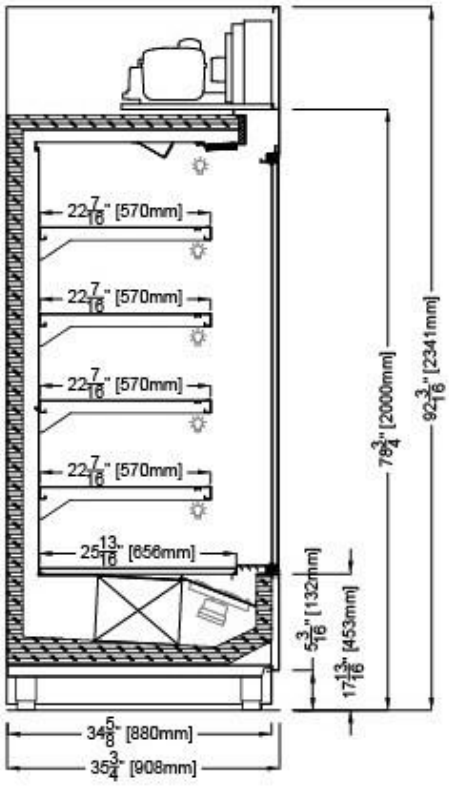

OPTIONAL:
REMOTE CONDENSING UNIT

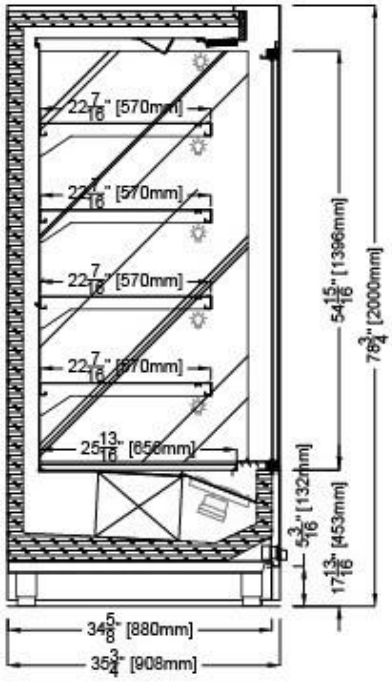

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

OPTIONALS: MURO H78 PRO WITH ROLL DOWN SHUTTER

SECTION VIEW

OPTIONAL:
REMOTE CONDENSING UNIT

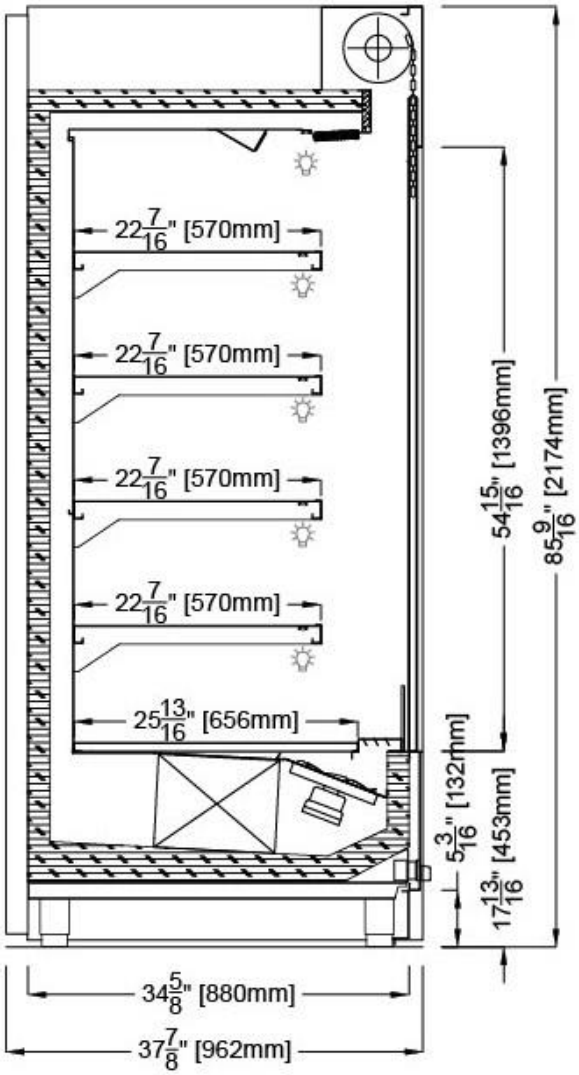

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

MURO H78 PRO SELF SERVE AIR SCREEN REFRIGERATION					
TECHNICAL FEATURES		**MODELS**			
		MURO H78 PRO 600 (MUROPH78GS25)	**MURO H78 PRO 1000** (MUROPH78GS41)	**MURO H78 PRO 1200** (MUROPH78GS49)	**MURO H78 PRO 1500** (MUROPH78GS61)
External Dimensions (L-D-H) Inches-MM	Inches MM	*25 3/16" - 35 3/4"- 78 3/4" *640 - 908 - 2000	*40 15/16" - 35 3/4" - 78 3/4" *1040 - 908 - 2000	*48 13/16" - 35 3/4" - 78 3/4" *1240 - 908 - 2000	*60 5/8" - 35 3/4" - 78 3/4" *1540 - 1117 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	31" - 44" - 85" 787 - 1117 - 2160	46" - 44" - 85" 1168 - 1117 - 2160	56" - 44" - 85" 1422 - 1117 - 2160	67" - 44" - 85" 1701 - 1117 - 2160
Operating Temperature	°F	40°F	40°F	40°F	40°F
Air Cooled Condensing Unit	---	1	1	1	1
BTU'S @ +10°F Expansion Temperature	**BTU'S	**6500	**7850	**8900	**10,200
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1450/6.9	1650/7.2	2500/14.5	2800/14.5
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 3/8" Liquid	3/4" Suction, 3/8" Liquid
Net Weights	Kg/Lb	350	400	610	730
Crated Weights	Kg/Lb	410	460	670	790

*DIMENSIONS ARE WITH STANDARD GLASS SIDES

**ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT.

NOTES:
1) 85°F AMBIENT AND 55% RELATIVE HUMIDITY | 2) FLOOR SINK RECOMMENDED ON THESE MODELS

Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO

MODELS: MURO H78 PRO 600, MURO H78 PRO 1000, MURO H78 PRO 1200, MURO H78 PRO 1500, MURO H78 PRO 1800, MURO H78 PRO 2000, MURO H78 PRO 2400

MURO H78 PRO SELF SERVE AIR SCREEN REFRIGERATION				
TECHNICAL FEATURES		**MODELS**		
		MURO H78 PRO 1800 (MUROPH78GS72)	**MURO H78 PRO 2000 (MUROPH78GS80)**	**MURO H78 PRO 2400 (MUROPH78GS96)**
External Dimensions (L-D-H) Inches-MM	Inches MM	*72 7/16" - 35 3/4" - 78 3/4" *1840 - 908 - 2000	*80 5/16" - 35 3/4" - 78 3/4" *2040 - 908 - 2000	*96 1/16" - 35 3/4" - 78 3/4" *2440 - 908 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	79" - 44" - 85" 2006 - 1117 - 2160	87" - 44" - 85" 2209 - 1117 - 2160	103" - 44" - 85" 2616 - 1117 - 2160
Operating Temperature	°F	40°F	40°F	40°F
Air Cooled Condensing Unit	---	1	1	1
BTU'S @ +10°F Expansion Temperature	**BTU'S	**11,500	**13,500	**17,000
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	3500/16.5	3900/17.5	(2) 2500/14.5
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	3/4" Suction, 3/8" Liquid	7/8" Suction, 3/8" Liquid	(2) 5/8" Suction, 3/8" Liquid
Net Weights	Kg/Lb	840	950	1100
Crated Weights	Kg/Lb	900	1010	1160
*DIMENSIONS ARE WITH GLASS SIDES				
**ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT.				
NOTES: 1) 85°F AMBIENT AND 55% RELATIVE HUMIDITY | 2) FLOOR SINK RECOMMENDED ON THESE MODELS				

Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

Photos shown with Muro H78 Neutral shown with Epoxy coated black interior and laminate exterior options.

Visit our website for more finishing options and RAL colors
www.oscartek.com

MURO H78 NEUTRAL SELF SERVE

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

STANDARD FEATURES

- Double pane glass ends
- Diffused 3000°K LED lighting on each shelf and canopy
- Straight or inclined shelves
- Roll down curtain
- Stainless steel foam in place bottom and top
- Adjustable feet
- Cases ship standard polished stainless steel interior and exterior

OPTIONS

- Solid sides: add 13/16” each side
- Roll down locking shutter with solid sides required: add 1 3/4" each side
- Sliding doors with solid sides required: add 13/16” each side
- Swing doors: available in glass sides and solid sides (add 13/16” each side)
- Joint Kit for multiplexing continuous line up
- Shelf fence for inclined position
- Tempered Glass shelves in lieu of stainless steel
- Epoxy RAL color interior and exterior over stainless steel
- Unfinished panels to accept custom Millwork
- Cold or Dry Storage on Remote application
- RAL color/custom plastic wood laminate exterior front and sides
- Casters
- Custom height Chassis modification
- Able to match to Provino wine, charcuterie, and freezer

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 NEUTRAL

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

STANDARD: MURO H78 NEUTRAL SELF SERVE

PLAN VIEWS

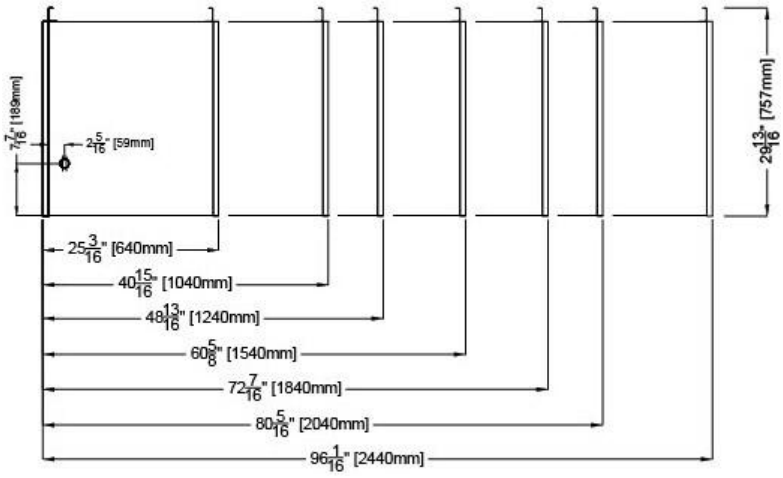

FRONT ELEVATIONS

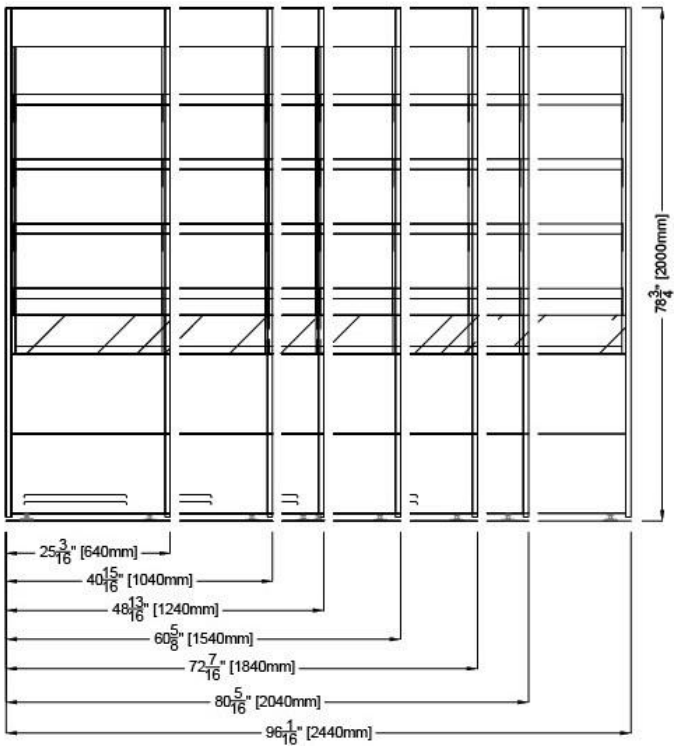

ELECTRICAL LEGEND	
⌽	POWER

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 NEUTRAL

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

STANDARD: MURO H78 NEUTRAL WITH GLASS SIDES

SECTION VIEWS

STANDARD:
TO MATCH WITH MURO H78 REFRIDGERATED BOTTOM MOUNT CONDENSING UNIT

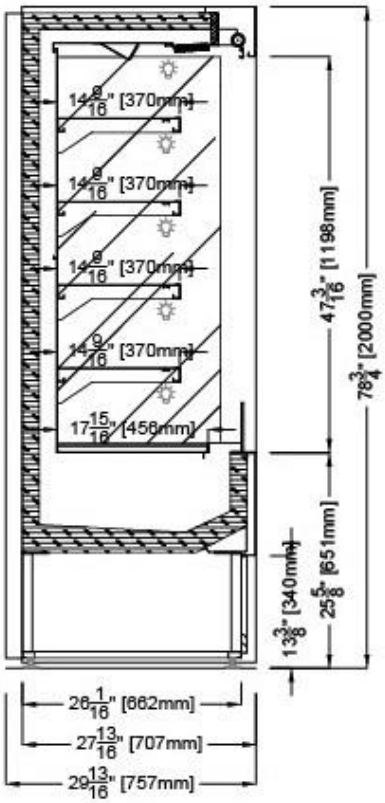

OPTIONAL:
TO MATCH WITH MURO H78 REFRIDGERATED TOP MOUNT CONDENSING UNIT

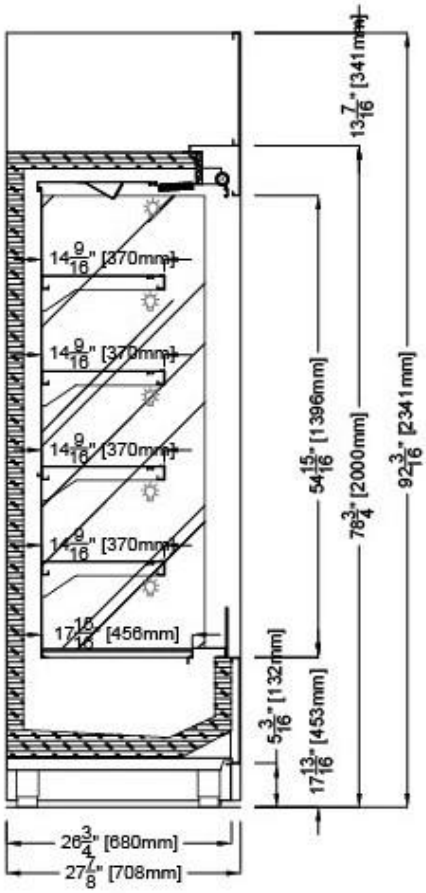

OPTIONAL:
TO MATCH WITH MURO H78 REFRIDGERATED REMOTE CONDENSING UNIT

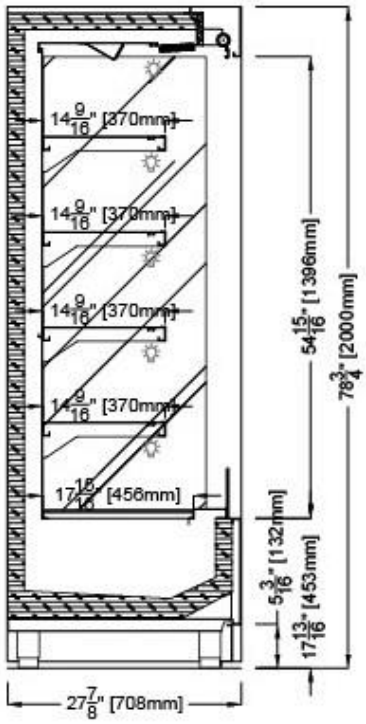

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 NEUTRAL

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

OPTIONALS: MURO H78 NEUTRAL WITH SLIDING GLASS DOORS

SECTION VIEWS

OPTIONAL:
TO MATCH WITH MURO H78
REFRIDGERATED BOTTOM
MOUNT CONDENSING UNIT

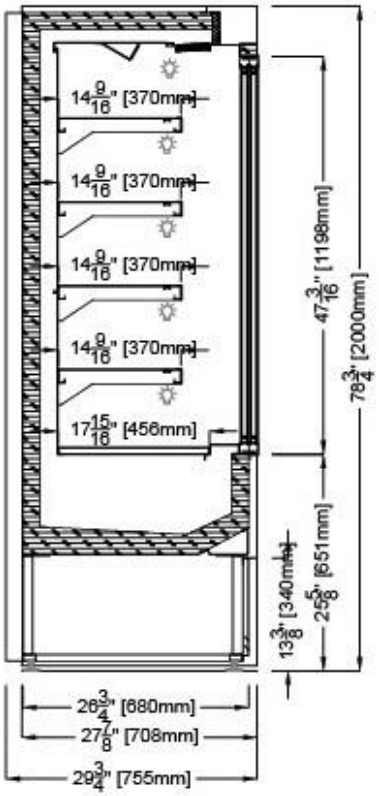

OPTIONAL:
TO MATCH WITH MURO H78
REFRIDGERATED TOP
MOUNT CONDENSING UNIT

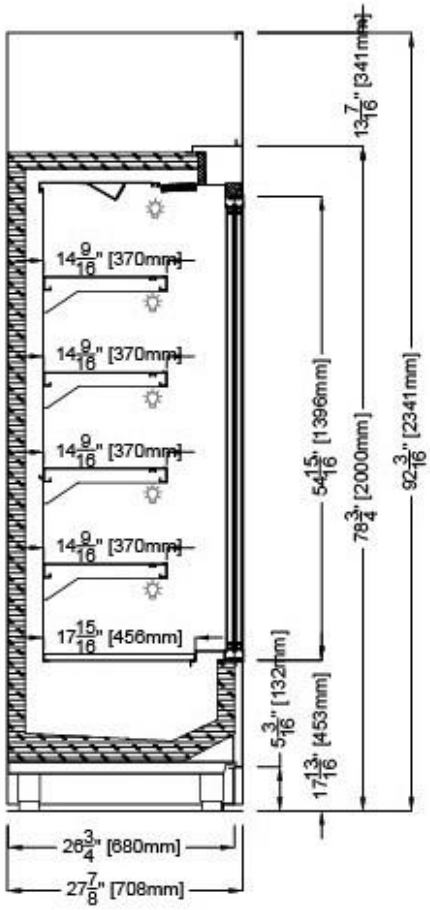

OPTIONAL:
TO MATCH WITH MURO H78
REFRIDGERATED REMOTE
CONDENSING UNIT

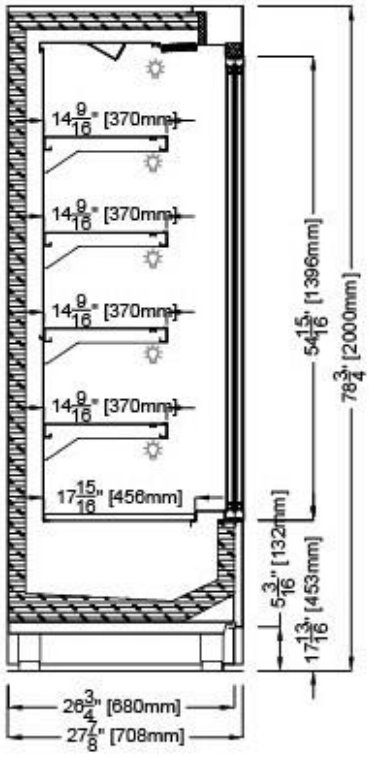

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 NEUTRAL

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

OPTIONALS: MURO H78 NEUTRAL WITH SWING GLASS DOORS

SECTION VIEWS

OPTIONAL:
TO MATCH WITH MURO H78 REFRIDGERATED BOTTOM MOUNT CONDENSING UNIT

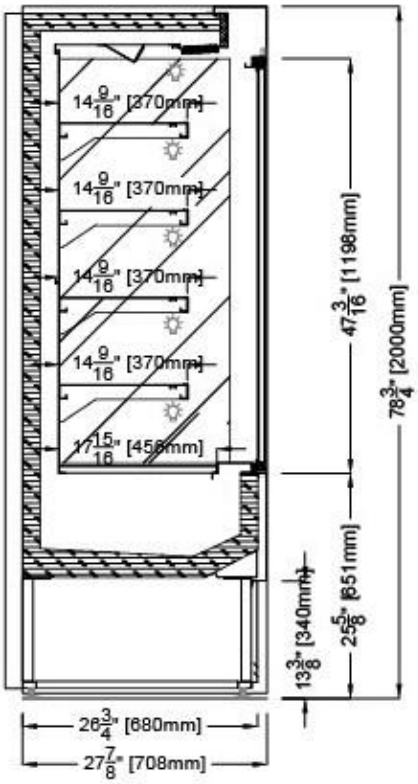

OPTIONAL:
TO MATCH WITH MURO H78 REFRIDGERATED TOP MOUNT CONDENSING UNIT

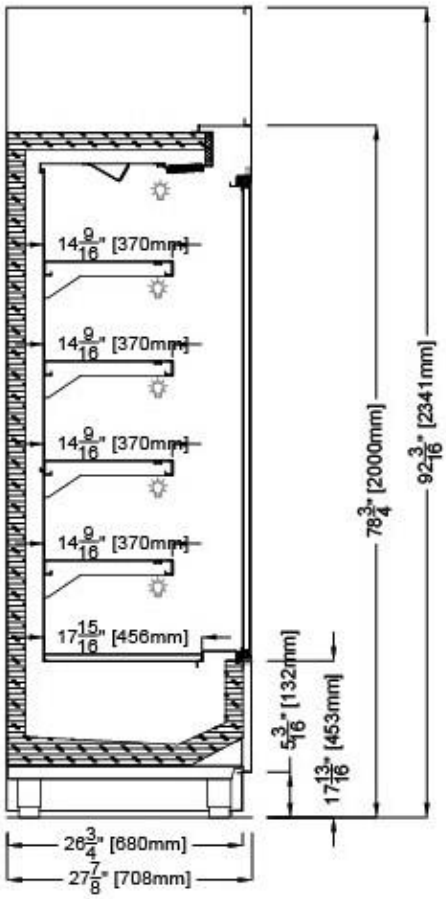

OPTIONAL:
TO MATCH WITH MURO H78 REFRIDGERATED REMOTE CONDENSING UNIT

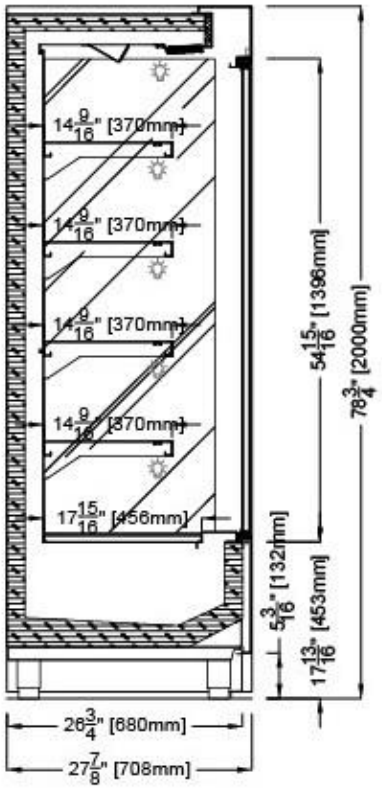

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 NEUTRAL

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

OPTIONALS: MURO H78 NEUTRAL WITH ROLL DOWN SHUTTER

SECTION VIEWS

OPTIONAL:
TO MATCH WITH MURO H78
REFRIDGERATED REMOTE
CONDENSING UNIT

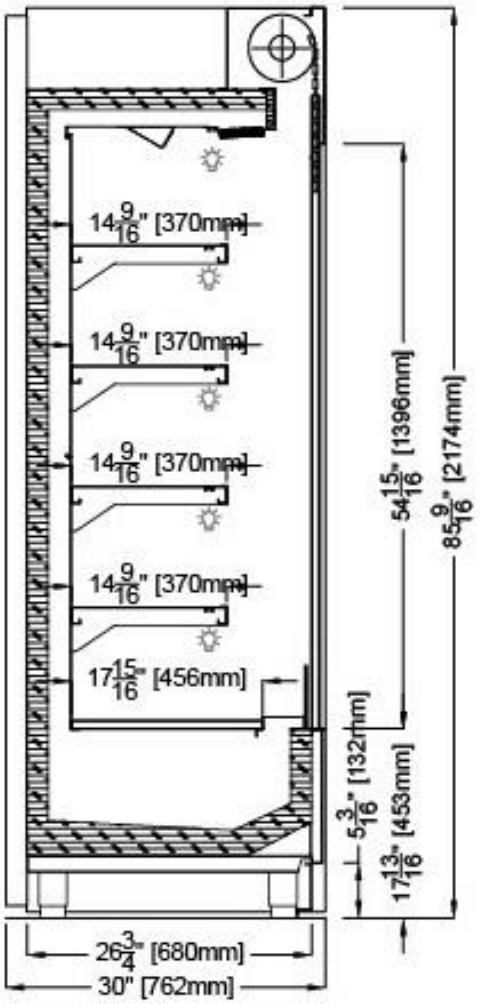

OPTIONAL:
TO MATCH WITH MURO H78
REFRIDGERATED TOP
MOUNT CONDENSING UNIT

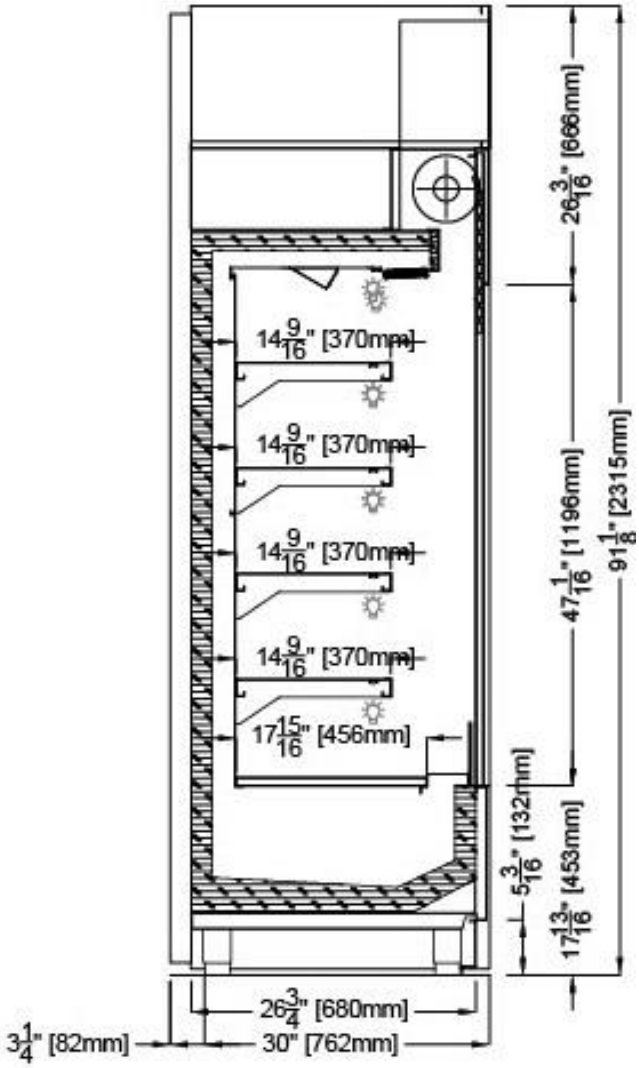

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

OSCARTEK
Discover the Art of Display...

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 NEUTRAL

MODELS: MURO H78 N600, MURO H78 N1000, MURO H78 N1200, MURO H78 N1500, MURO H78 N1800, MURO H78 N2000, MURO H78 N2400

MURO H78 SELF SERVE NEUTRAL					
TECHNICAL FEATURES		MODELS			
		MURO H78 N600	MURO H78 N1000	MURO H78 N1200	MURO H78 N1500
External Dimensions (L-D-H) Inches-MM	Inches MM	*25 3/16" - 29 13/16"- 78 3/4" *640 - 757 - 2000	*40 15/16" - 29 13/16" - 78 3/4" *1040 - 757 - 2000	*48 13/16" - 29 13/16" - 78 3/4" *1240 - 757 - 2000	*60 5/8" - 29 13/16" - 78 3/4" *1540 - 757 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	31" - 36" - 85" 787 - 914 - 2160	46" - 36" - 85" 1168 - 914 - 2160	56" - 36" - 85" 1422 - 914 - 2160	67" - 36" - 85" 1701 - 914 - 2160
Operating Temperature	°F	Ambient	Ambient	Ambient	Ambient
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	180/1.5	198/1.65	240/2	270/2.25
Net Weights	Lb	440	735	880	975
Crated Weights	Lb	620	915	1060	1188
*DIMENSIONS ARE WITH STANDARD GLASS SIDES					

MURO H78 SELF SERVE NEUTRAL				
TECHNICAL FEATURES		MODELS		
		MURO H78 N1800	MURO H78 N2000	MURO H78 N2400
External Dimensions (L-D-H) Inches-MM	Inches MM	*72 7/16" - 29 13/16" - 78 3/4" *1840 - 757 - 2000	*80 5/16" - 29 13/16" - 78 3/4" *2040 - 757 - 2000	*96 1/16" - 29 13/16" - 78 3/4" *2440 - 757 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	79" - 36" - 85" 2006 - 914 - 2160	87" - 36" - 85" 2209 - 914 - 2160	103" - 36" - 85" 2616 - 914 - 2160
Operating Temperature	°F	Ambient	Ambient	Ambient
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	288/2.4	320/2.65	360/3
Net Weights	Lb	1015	1050	1760
Crated Weights	Lb	1230	1275	2120
*DIMENSIONS ARE WITH STANDARD GLASS SIDES				

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL SELF SERVE

Photo shown with Muro H78 PRO Pro Neutral shown with Epoxy coated black interior and RAL color exterior options

Visit our website for more finishing options and RAL colors
www.oscartek.com

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

STANDARD FEATURES

- Double pane glass ends
- Diffused 3000°K LED lighting on each shelf and canopy
- Straight or inclined shelves
- Roll down curtain
- Stainless steel foam in place bottom and top
- Adjustable feet
- Cases ship standard polished stainless steel interior and exterior

OPTIONS

- Solid sides: add 13/16” each side
- Roll down locking shutter with solid sides required: add 1 3/4" each side
- Sliding doors with solid sides required: add 13/16” each side
- Swing doors: available in glass sides and solid sides (add 13/16” each side)
- Joint Kit for multiplexing continuous line up
- Shelf fence for inclined position
- Tempered Glass shelves in lieu of stainless steel
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Cold or Dry Storage on Remote application
- Casters
- Custom height Chassis modification
- Able to match to Provino wine, charcuterie, and Freezer

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

STANDARD: MURO H78 PRO NEUTRAL SELF SERVE

PLAN VIEWS

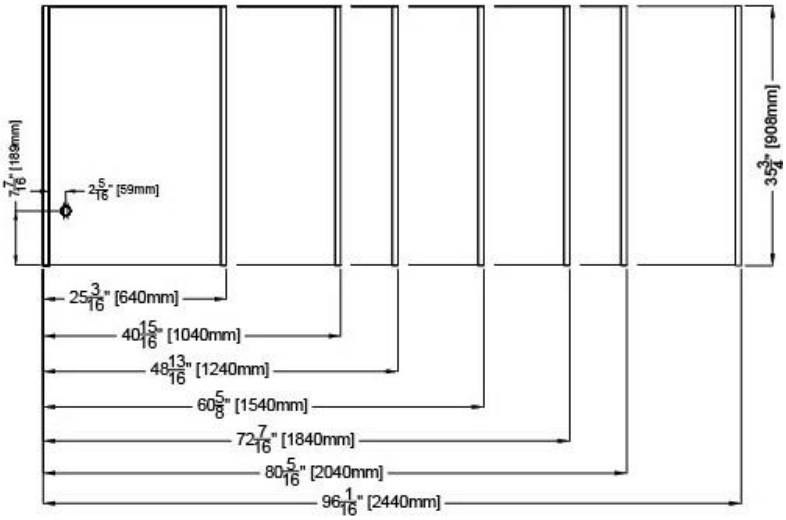

FRONT ELEVATIONS

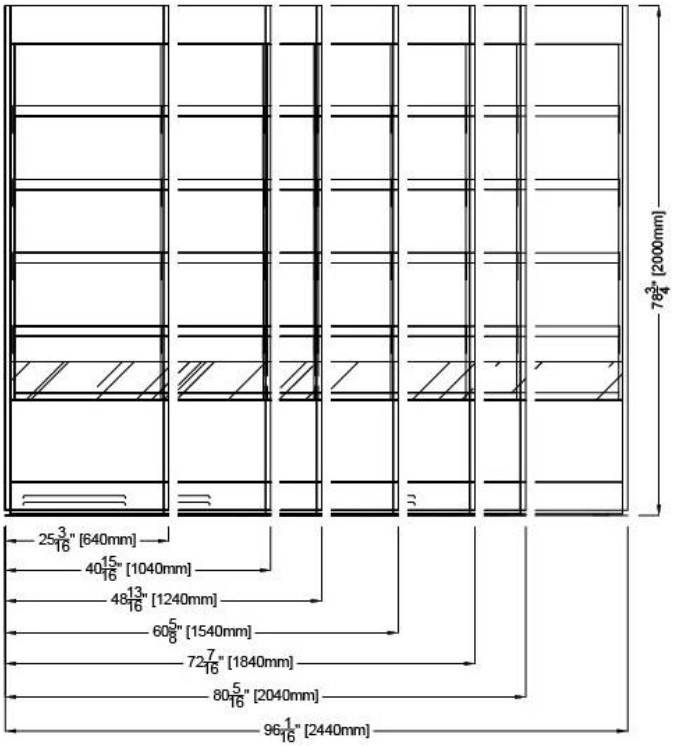

ELECTRICAL LEGEND	
⌽	POWER

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

STANDARD: MURO H78 PRO NEUTRAL WITH GLASS SIDES

SECTION VIEW

STANDARD:
TO MATCH WITH MURO H78 PRO REFRIDGERATED REMOTE CONDENSING UNIT

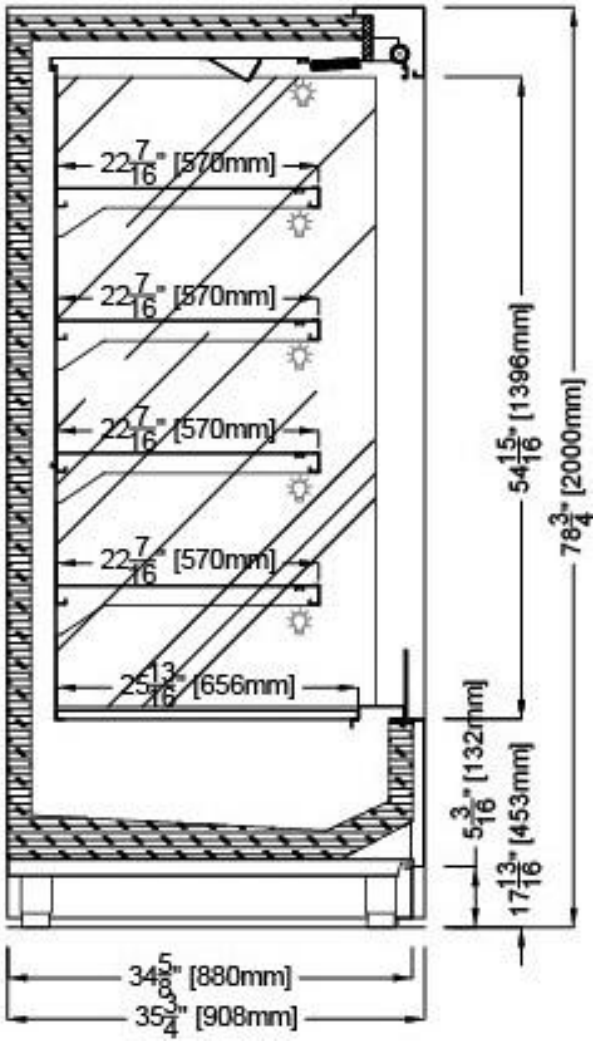

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

OPTIONALS: MURO H78 PRO NEUTRAL WITH SLIDING GLASS DOORS

SECTION VIEWS

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED BOTTOM MOUNT CONDENSING UNIT

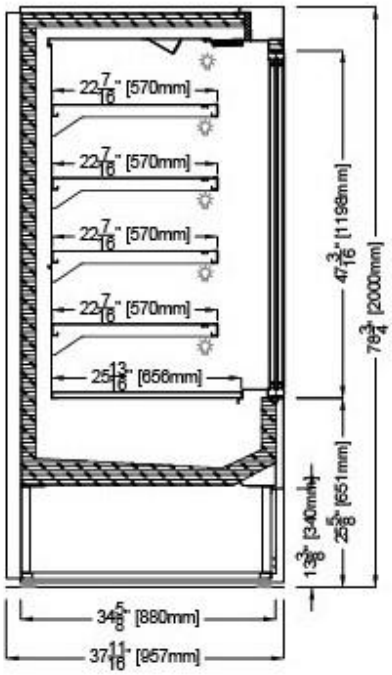

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED TOP MOUNT CONDENSING UNIT

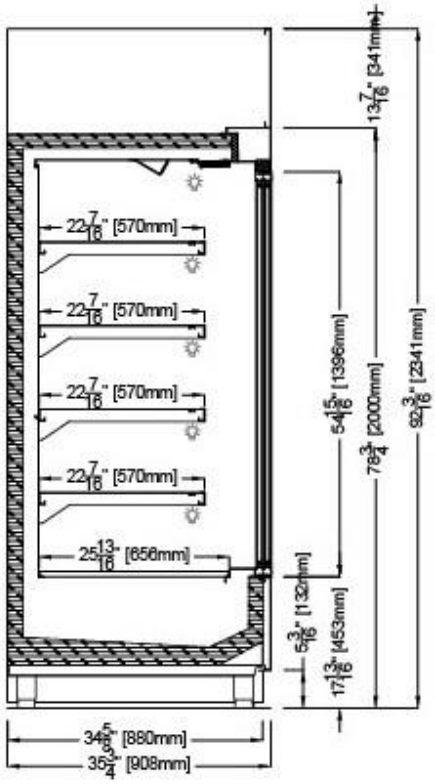

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED REMOTE CONDENSING UNIT

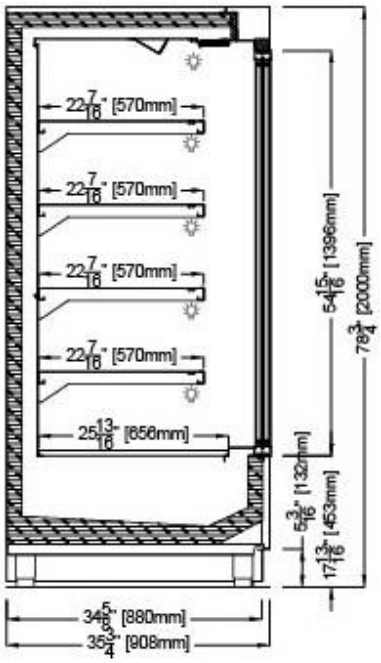

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

OPTIONALS: MURO H78 PRO NEUTRAL WITH SWING GLASS DOORS

SECTION VIEWS

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED BOTTOM MOUNT CONDENSING UNIT

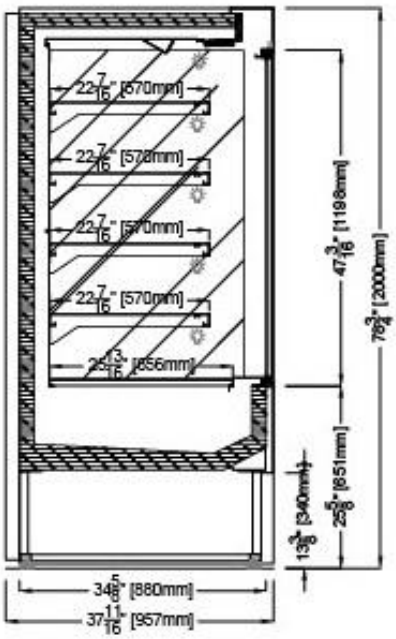

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED TOP MOUNT CONDENSING UNIT

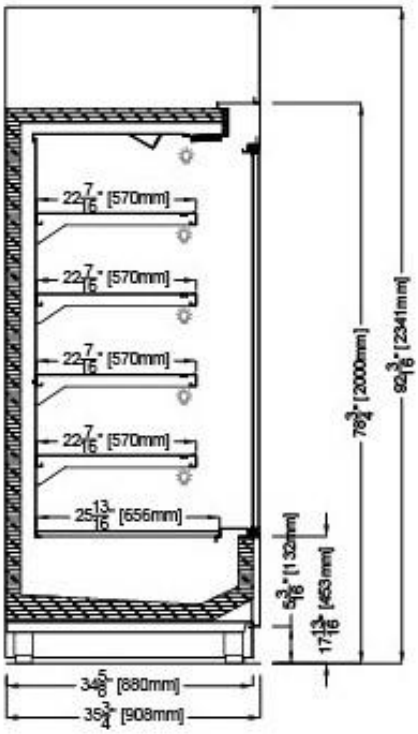

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED REMOTE CONDENSING UNIT

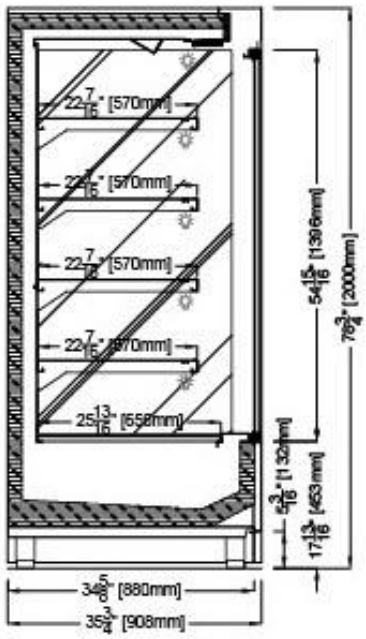

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK ®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

OPTIONALS: MURO H78 PRO NEUTRAL WITH ROLL DOWN SHUTTER

SECTION VIEWS

OPTIONAL:
TO MATCH WITH MURO H78 PRO REFRIDGERATED REMOTE CONDENSING UNIT

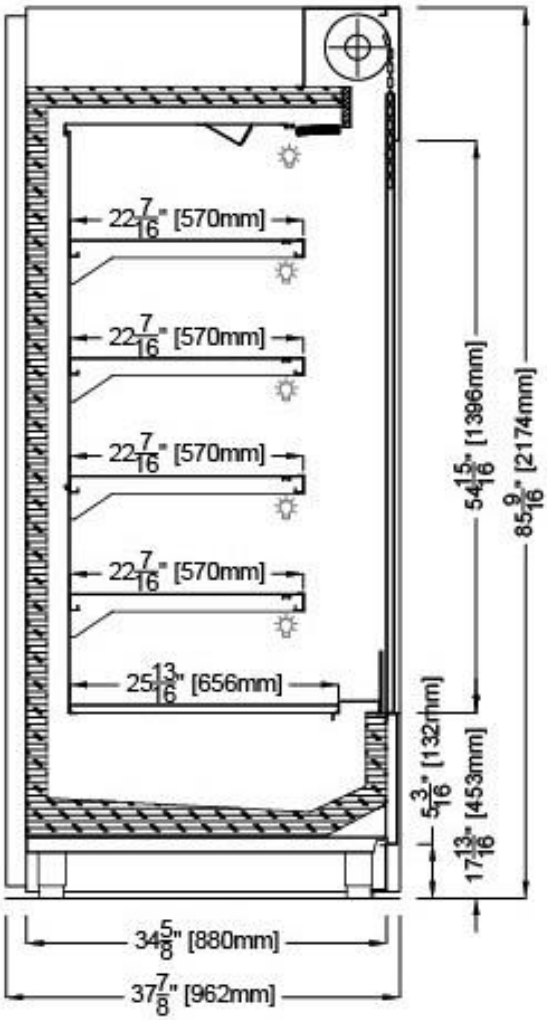

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

OSCARTEK
Discover the Art of Display...

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

MURO H78 PRO SELF SERVE NEUTRAL					
TECHNICAL FEATURES		MODELS			
		MURO H78 PRO N600	MURO H78 PRO N1000	MURO H78 PRO N1200	MURO H78 PRO N1500
External Dimensions (L-D-H) Inches-MM	Inches MM	*25 3/16" - 35 3/4"- 78 3/4" *640 - 908 - 2000	*40 15/16" - 35 3/4" - 78 3/4" *1040 - 908 - 2000	*48 13/16" - 35 3/4" - 78 3/4" *1240 - 908 - 2000	*60 5/8" - 35 3/4" - 78 3/4" *1540 - 1117 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	31" - 44" - 85" 787 - 1117 - 2160	46" - 44" - 85" 1168 - 1117 - 2160	56" - 44" - 85" 1422 - 1117 - 2160	67" - 44" - 85" 1701 - 1117 - 2160
Operating Temperature	°F	Ambient	Ambient	Ambient	Ambient
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	180/1.5	198/1.65	240/2	270/2.25
Net Weights	Lb	490	785	930	1025
Crated Weights	Lb	670	965	1110	1238
*DIMENSIONS ARE WITH STANDARD GLASS SIDES					

MURO H78 PRO SELF SERVE NEUTRAL				
TECHNICAL FEATURES		MODELS		
		MURO H78 PRO N1800	MURO H78 PRO N2000	MURO H78 PRO N2400
External Dimensions (L-D-H) Inches-MM	Inches MM	*72 7/16" - 35 3/4" - 78 3/4" *1840 - 908 - 2000	*80 5/16" - 35 3/4" - 78 3/4" *2040 - 908 - 2000	*96 1/16" - 35 3/4" - 78 3/4" *2440 - 908 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	79" - 44" - 85" 2006 - 1117 - 2160	87" - 44" - 85" 2209 - 1117 - 2160	103" - 44" - 85" 2616 - 1117 - 2160
Operating Temperature	°F	Ambient	Ambient	Ambient
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	288/2.4	320/2.65	360/3
Net Weights	Lb	1065	1100	1810
Crated Weights	Lb	1280	1325	2170
*DIMENSIONS ARE WITH GLASS SIDES				

Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

Photos shown with glass sides, option RAL color finish exterior and interior. Cases ship standard stainless steel interior and exterior.

Visit our website for more finishing options and RAL colors
www.oscartek.com

MURO H78 HOT (DRY) Self-Serve Air Screen Wall Showcase

MODELS: MURO H78 H600, MURO H78 H1000, MURO H78 H1200, MURO H78 H1500

STANDARD FEATURES

- Match H78 series Refrigerated Grab n Go
- Double pane glass ends
- Dixell digital control
- Heated lamp on each shelf and canopy
- Stainless steel shelves with heated deck plates
- Stainless steel foam in place bottom and top
- Adjustable feet
- Cases ship standard stainless steel interior and exterior

OPTIONS

- Convection heat/fan
- Solid sides: add 13/16” each side
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Hot or Cold storage
- Condensate evaporator pan with fan
- Casters
- Custom height Chassis modification
- Able to match to Provino wine, charcuterie, and Freezer

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 HOT (DRY)

MODELS: MURO H78 H600, MURO H78 H1000, MURO H78 H1200, MURO H78 H1500

STANDARD: MURO H78 HOT SELF SERVE

PLAN VIEWS

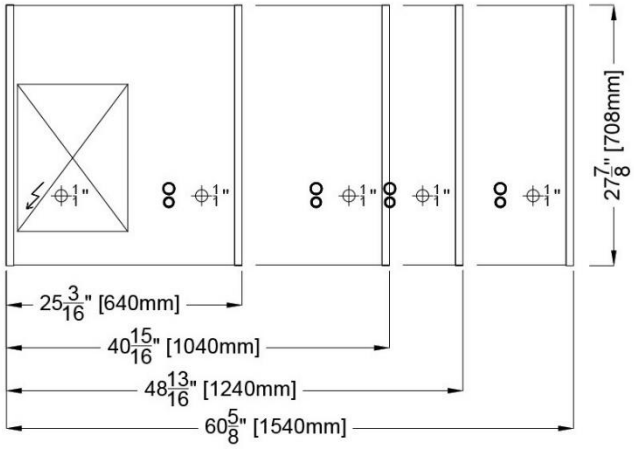

FRONT ELEVATIONS

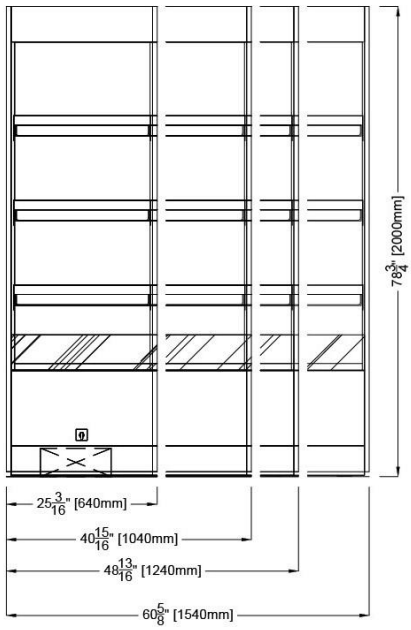

ELECTRICAL LEGEND	
∞	REFRIGERATION LINES
⌀1"	DRAIN
⚡	POWER

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 HOT (DRY)

MODELS: MURO H78 H600, MURO H78 H1000, MURO H78 H1200, MURO H78 H1500

STANDARD: MURO H78 HOT SELF SERVE

SECTION VIEWS

OPTION #1 - TO MATCH WITH MURO H78 SELF CONTAINED CASES WHEN JOINED

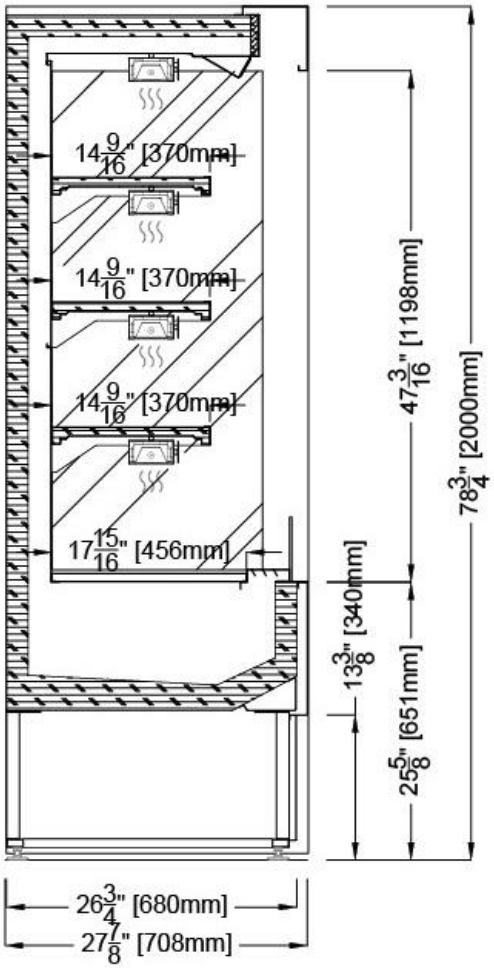

OPTION #2 – TO MATCH WITH MURO H78 REMOTE CASES WHEN JOINED

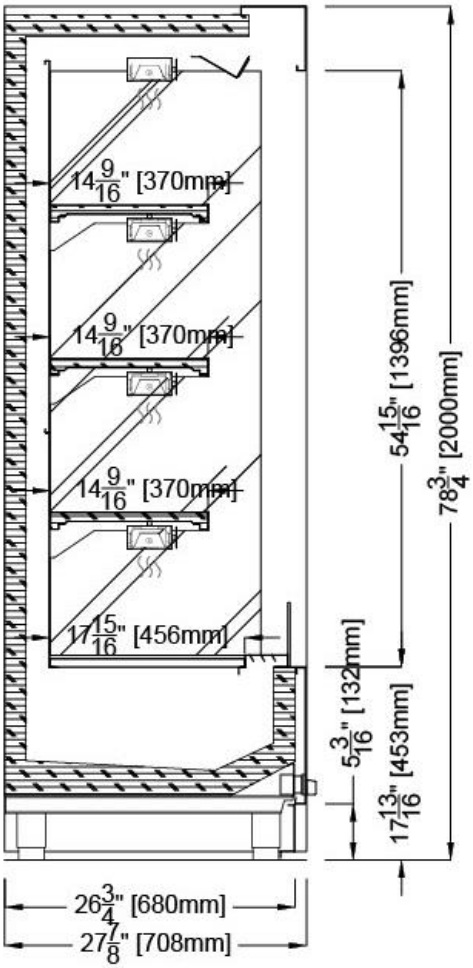

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

Project Name:_____
Item #:_____ Quantity:_____

MURO H78 HOT (DRY)

MODELS: MURO H78 H600, MURO H78 H1000, MURO H78 H1200, MURO H78 H1500

MURO H78 HOT (DRY) SELF SERVE					
TECHNICAL FEATURES		**MODELS**			
		MURO H78 HOT 600	**MURO H78 HOT 1000**	**MURO H78 HOT 1200**	**MURO H78 HOT 1500**
External Dimensions (L-D-H) Inches-MM	Inches MM	*25 3/16" - 27 7/8"- 78 3/4" *640 - 708 - 2000	*40 15/16" - 27 7/8" - 78 3/4" *1040 - 708 - 2000	*48 13/16" - 27 7/8" - 78 3/4" *1240 - 708 - 2000	*60 5/8" - 27 7/8" - 78 3/4" *1540 - 708 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	31" - 34" - 85" 787 - 864 - 2160	46" - 34" - 85" 1168 - 864 - 2160	56" - 34" - 85" 1422 - 864 - 2160	67" - 34" - 85" 1701 - 864 - 2160
Operating Temperature	°F	177°F	177°F	177°F	177°F
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1950/9.9	2650/12.8	3400/15.9	4200/17.5
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Net Weights	Kg/Lb	350	510	595	730
Crated Weights	Kg/Lb	410	570	655	790
*DIMENSIONS ARE WITH STANDARD GLASS SIDES					

Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com